

08/05/99
1c690 U.S. PTO

Microvision, Inc.
P.O. Box 3008
19910 North Creek Parkway
Bothell, WA 98011
(425) 415-6847
(425) 481-1625 facsimile

A

Express Mail No.: EL440420280US
Attorney Docket No.: MVIS 98-28

Filing Date: August 5, 1999

Box Patent Application
Assistant Commissioner for Patents
Washington, D.C. 20231

**NEW UTILITY PATENT APPLICATION TRANSMITTAL
AND FEE TRANSMITTAL**

1c584 U.S. PTO
09/369676
08/05/99

Inventor: Hakan Urey

For: **Scanned Display with Switched Feeds and Distortion Correction**

APPLICATION ELEMENTS AND ACCOMPANYING PARTS

- ☒ U.S. Utility Patent Application: Specification, 26 Claims, Abstract (54 pages).
☒ 38 Sheets of Drawings (Figs. 1-42).
☒ A Declaration and Power of Attorney.
☒ A Verified Statement of Small Entity Status.
☒ An assignment of patent application to Microvision, Inc., a corporation of the State of Washington.
☐ A Preliminary Amendment.
☐ An Information Disclosure Statement, Form PTO-1449, and Copies of Citations.
☐ Filed without formal signature documents or fee.

SMALL ENTITY FEE CALCULATION

Utility Filing Fee

\$380

Claims:

	No. Filed			Extra		Surcharge	
Total Claims	26	-20	=	6	x	\$9	= \$54
Independent Claims	5	-3	=	2	x	\$39	= \$78
Multiple Dependent Claims	0			0		\$130	\$0
Assignment Recordation	1			0		\$40	\$40

Total Fee Enclosed \$552

METHOD OF PAYMENT

- ☒ Payment enclosed ☒ Check ☐ Money Order ☐ Other
☒ The Commissioner is hereby authorized to
 ☐ Charge indicated fees and credit any over payments to Deposit Account No. _____
 ☒ Charge any additional fees required under 37 C.F.R. §§ 1.16 and 1.17 to Deposit Account No. 500284.

Submitted by:

Clarence T. Tegreene
Reg. No. 37,951

8/5/99
Date

VERIFIED STATEMENT CLAIMING SMALL ENTITY STATUS (37 CFR 1.9(F) & 1.27(c))—SMALL BUSINESS CONCERN		Docket Number MVIS 98-28
Applicant:	Hakan Urey	
Application No.:		
Filed:	August 5, 1999	
Title:	Scanned Display With Switched Feeds and Distortion Correction	

I hereby declare that I am

- ☐ the owner of the small business concern identified below:
☒ an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF SMALL BUSINESS CONCERN:

Microvision, Inc.

ADDRESS OF SMALL BUSINESS CONCERN:

19910 North Creek Parkway
Bothell, WA 98011

I hereby declare that the above identified small business concern qualifies as a small business concern as defined in 13 CFR 121.12, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees to the United States Patent and Trademark Office, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statements, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time, or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in:

- ☒ the specification filed herewith with title as listed above.
☐ the application identified above.
☐ the patent identified above.

If the rights held by the above identified small business concern are not exclusive, each individual, concern, or organization having rights in the invention must file separate verified statements averring to their status as small entities, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).

665000-9793250

Each person, concern, or organization having any rights in the invention is listed below:

- ☒ no such person, concern, or organization exists.
☐ each such person, concern, or organization is listed below.

Separate verified statements are required from each named person, concern, or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING

TITLE OF PERSON IF OTHER THAN OWNER

ADDRESS OF PERSON SIGNING

SIGNATURE

DATE

Richard F. Rutkowski

President and Chief Executive Officer

19910 North Creek Parkway, Bothell, WA 98011

8/4/77

SCANNED DISPLAY WITH SWITCHED FEEDS AND DISTORTION CORRECTION

Technical Field

The present invention relates to scanned light devices and, more particularly, to scanned light beam displays and imaging devices for viewing or collecting images.

Background of the Invention

A variety of techniques are available for providing visual displays of graphical or video images to a user. In many applications cathode ray tube type displays (CRTs), such as televisions and computer monitors produce images for viewing. Such devices suffer from several limitations. For example, CRTs are bulky and consume substantial amounts of power, making them undesirable for portable or head-mounted applications.

Matrix addressable displays, such as liquid crystal displays and field emission displays, may be less bulky and consume less power. However, typical matrix addressable displays utilize screens that are several inches across. Such screens have limited use in head mounted applications or in applications where the display is intended to occupy only a small portion of a user's field of view. Such displays have been reduced in size, at the cost of increasingly difficult processing and limited resolution or brightness. Also, improving resolution of such displays typically requires a significant increase in complexity.

One approach to overcoming many limitations of conventional displays is a scanned beam display, such as that described in U. S. Patent No. 5,467,104 of Furness et al., entitled VIRTUAL RETINAL DISPLAY, which is incorporated

herein by reference. As shown diagrammatically in Figure 1, in one embodiment of a scanned beam display 40, a scanning source 42 outputs a scanned beam of light that is coupled to a viewer's eye 44 by a beam combiner 46. In some scanned displays, the scanning source 42 includes a scanner, such as scanning mirror or acousto-optic scanner, that scans a modulated light beam onto a viewer's retina. In other embodiments, the scanning source may include one or more light emitters that are rotated through an angular sweep.

The scanned light enters the eye 44 through the viewer's pupil 48 and is imaged onto the retina 59 by the cornea. In response to the scanned light the viewer perceives an image. In another embodiment, the scanned source 42 scans the modulated light beam onto a screen that the viewer observes. One example of such a scanner suitable for either type of display is described in U. S. Patent No. 5,557,444 to Melville et al., entitled MINIATURE OPTICAL SCANNER FOR A TWO-AXIS SCANNING SYSTEM, which is incorporated herein by reference.

Sometimes such displays are used for partial or augmented view applications. In such applications, a portion of the display is positioned in the user's field of view and presents an image that occupies a region 43 of the user's field of view 45, as shown in Figure 2A. The user can thus see both a displayed virtual image 47 and background information 49. If the background light is occluded, the viewer perceives only the virtual image 47, as shown in Figure 2B.

One difficulty that may arise with such displays is raster pinch, as will now be explained with reference to Figures 3-5. As shown diagrammatically in Figure 3, the scanning source 42 includes an optical source 50 that emits a beam 52 of modulated light. In this embodiment, the optical source 50 is an optical fiber that is driven by one or more light emitters, such as laser diodes (not shown). A lens 53 gathers and focuses the beam 52 so that the beam 52 strikes a turning mirror 54 and is directed toward a horizontal scanner 56. The horizontal scanner 56 is a mechanically resonant scanner that scans the beam 52 periodically in a sinusoidal fashion. The horizontally scanned beam then travels to a vertical scanner 58 that

scans periodically to sweep the horizontally scanned beam vertically. For each angle of the beam 52 from the scanners 58, an exit pupil expander 62 converts the beam 52 into a set of beams 63. Eye coupling optics 60 collect the beams 63 and form a set of exit pupils 65. The exit pupils 65 together act as an expanded exit pupil for viewing by a viewer's eye 64. One such expander is described in U. S. Patent No. 5,701,132 of Kollin et al., entitled VIRTUAL RETINAL DISPLAY WITH EXPANDED EXIT PUPIL, which is incorporated herein by reference. One skilled in the art will recognize that, for differing applications, the exit pupil expander 62 may be omitted, may be replaced or supplemented by an eye tracking system, or may have a variety of structures, including diffractive or refractive designs. For example, the exit pupil expander 62 may be a planar or curved structure and may create any number or pattern of output beams in a variety of patterns. Also, although only three exit pupils are shown in Figure 3, the number of pupils may be almost any number. For example, in some applications a 15 by 15 array may be suitable.

Returning to the description of scanning, as the beam scans through each successive location in the beam expander 62, the beam color and intensity is modulated in a fashion to be described below to form a respective pixel of an image. By properly controlling the color and intensity of the beam for each pixel location, the display 40 can produce the desired image.

Simplified versions of the respective waveforms of the vertical and horizontal scanners are shown in Figure 4. In the plane 66 (Figure 3), the beam traces the pattern 68 shown in Figure 5. Though Figure 5 shows only eleven lines of image, one skilled in the art will recognize that the number of lines in an actual display will typically be much larger than eleven. As can be seen by comparing the actual scan pattern 68 to a desired raster scan pattern 69, the actual scanned beam 68 is "pinched" at the outer edges of the beam expander 62. That is, in successive forward and reverse sweeps of the beam, the pixels near the edge of the scan pattern are unevenly spaced. This uneven spacing can cause the pixels to

can cause the pixels to overlap or can leave a gap between adjacent rows of pixels. Moreover, because the image information is typically provided as an array of data, where each location in the array corresponds to a respective position in the ideal raster pattern 69, the displaced pixel locations can cause image distortion.

For a given refresh rate and a given wavelength, the number of pixels per line is determined in the structure of Figure 3 by the mirror scan angle θ and mirror dimension D perpendicular to the axis of rotation. For high resolution, it is therefor desirable to have a large scan angle θ and a large mirror. However, larger mirrors and scan angles typically correspond to lower resonant frequencies. A lower resonant frequency provides fewer lines of display for a given period. Consequently, a large mirror and larger scan angle may produce unacceptable refresh rates.

Summary of the Invention

A display includes a primary scanning mechanism that simultaneously scans a plurality of beams of light both horizontally and vertically along substantially continuous scan paths where each beam defines a discrete “tile” of an image. In the preferred embodiment, the scanning mechanism includes a mirror that pivots to sweep the beams horizontally.

Optical sources are aligned to provide the beams of light to the scanning mechanism from respective input angles. The input angles are selected such that the scanning mechanism sweeps each beam of light across a respective distinct region of an image field. Because the respective regions are substantially non-overlapping, each beam of light generates a substantially spatially distinct region of the image. The respective regions are immediately adjacent or may overlap slightly, so that the spatially distinct regions are “tiled” to form a contiguous image. Because movement of the mirror produces movement of all of the beams, the display produces each of the spatially separate regions simultaneously. As described above, the scan angle θ and the mirror dimensions determine the number

of pixels drawn for each beam. The total number of pixels in a line can thus substantially equal the number of pixels for each beam multiplied by the number of beams.

In one embodiment, the scanning mechanism scans in a generally raster pattern with a horizontal component and a vertical component. A mechanically resonant scanner produces the horizontal component by scanning the beam sinusoidally. A non-resonant or semi-resonant scanner typically scans the beam vertically with a substantially constant angular speed.

In one embodiment, the scanning mechanism includes a biaxial microelectromechanical (MEMs) scanner. The biaxial scanner uses a single mirror to provide both horizontal and vertical movement of each of the beams. In one embodiment, the display includes a buffer that stores data and outputs the stored data to each of the optical sources. A correction multiplier provides correction data that adjusts the drive signals to the optical sources in response to the stored data. The adjusted drive signals compensate for variations in output intensity caused by pattern dependent heating.

In another embodiment, an imager acquires images in tiles by utilizing two separate detector and optical source pairs. One embodiment of the imager includes LEDs or lasers as the optical sources, where each of the optical sources is at a respective wavelength. The scanning assembly simultaneously directs light from each of the optical sources to respective regions of an image field. For each location in the image field, each of the detectors selectively detects light at the wavelength, polarization, or other characteristic of its corresponding source, according to the reflectivity of the respective location. The detectors output electrical signals to decoding electronics that store data representative of the image field.

In one embodiment, the imager includes a plurality of detector/optical source pairs at each of red, green, and blue wavelength bands. Each pair operates at a respective wavelength within its band. For example, a first of the red pairs

operates at a first red wavelength and a second of the red pairs operates at a second red wavelength different from the first.

In one embodiment, a pair of optical sources alternately feed a single scanner from different angles. During forward sweeps of the scanner, a first of the sources emits light modulated according to one half of a line. During the return sweep, the second source emits light modulated according to the second half of the line. Because the second sweep is in the opposite direction from the first, data corresponding to the second half of the line is reversed before being applied to the second source so that light from the second source is modulated to write the second half of the line in reverse.

In one embodiment of the alternate feeding approach, a single light emitter feeds an input fiber that is selectively coupled to one of two separate fibers by an optical switch. During forward sweeps, the optical switch couples the input fiber to a first of the separate fibers so that the first separate fiber forms the first optical source. During reverse sweep, the optical switch feeds the second separate fiber so that the second separate fiber forms the second source. This embodiment thus allows a single light emitter to provide light for both optical sources.

The alternate feeding approach can be expanded to write more than just two tiles. In one approach, the input fiber is coupled to four fibers by a set of optical switches, where each fiber feeds the scanning assembly from a respective angle. The switches are activated according to the direction of the sweep and according to the tracked location of the user's vision. For example, when the user looks at the top half of the image, a first fiber, aligned to produce an image in the upper left tile feeds the scanner during the forward sweeps. A second fiber, aligned to produce an upper right tile feeds the scanner during reverse sweeps. When the user looks at the lower half of the image, a third fiber, aligned to produce the lower left tile, feeds scanner during forward sweeps. A fourth fiber, aligned to produce the lower right tile, feeds the scanner during reverse sweeps.

Brief Description of the Figures

Figure 1 is a diagrammatic representation of a display aligned to a viewer's eye.

Figure 2A is a combined image perceived by a user resulting from the combination of light from an image source and light from a background.

Figure 2B is an image perceived by a user from the display of Figure 1 where the background light is occluded.

Figure 3 is a diagrammatic representation of a scanner and a user's eye showing bi-directional scanning of a beam and coupling to the viewer's eye.

Figure 4 is a signal-timing diagram of a scan pattern scanner in the scanning assembly of Figure 3.

Figure 5 is a signal position diagram showing the path followed by the scanned beam in response to the signals of Figure 4, as compared to a desired raster scan path.

Figure 6 is a diagrammatic representation of a display according to the one embodiment invention including dual light beams.

Figure 7 is an isometric view of a head-mounted scanner including a tether.

Figure 8 is a diagrammatic representation of a scanning assembly within the scanning display of Figure 6, including a correction mirror.

Figure 9 is an isometric view of a horizontal scanner and a vertical scanner suitable for use in the scanning assembly of Figure 8.

Figure 10 is a diagrammatic representation of scanning with two input beams, showing slightly overlapped tiles.

Figure 11 is a top plan view of a biaxial scanner showing four feeds at spatially separated locations.

Figure 12 is a diagrammatic representation of four tiles produced by the four feed scanner of Figure 11.

Figure 13 is a schematic of a system for driving the four separate feeds of Figure 11, including four separate buffers.

Figure 14 is a signal-timing diagram comparing a ramp signal with a desired signal for driving the vertical scanner.

Figure 15 is a signal timing diagram showing positioning error and correction for the vertical scanning position.

Figure 16 is a side cross sectional view of a piezoelectric correction scanner.

Figure 17A is a top plan view of a microelectromechanical (MEMs) correction scanner.

Figure 17B is a side cross-sectional view of the MEMs correction scanner of Figure 17A showing capacitive plates and their alignment to the scanning mirror.

Figure 18 shows corrected scan position using a sinusoidally driven scanner through 90% of the overall scan.

Figure 19 shows an alternative embodiment of a reduced error scanner where scan correction is realized by adding a vertical component to the horizontal mirror.

Figure 20 is a position diagram showing the scan path of a beam deflected by the scanner of Figure 19.

Figure 21 is a diagrammatic view of a scanning system, including a biaxial microelectromechanical (MEMs) scanner and a MEMs correction scanner.

Figure 22 is a diagrammatic view of a correction scanner that shifts an input beam by shifting the position or angle of the input fiber.

Figure 23 is a diagrammatic view of a correction scanner that includes an electro-optic crystal that shifts the input beam in response to an electrical signal.

Figure 24 is a diagrammatic view of an imager that acquires external light from a target object.

Figure 25 is a diagrammatic view of an alternative embodiment of the imager of Figure 24 that also projects a visible image.

Figure 26 is a signal timing diagram showing deviation of a sinusoidal scan position versus time from the position of a linear scan.

Figure 27 is a diagram showing diagrammatically how a linear set of counts can map to scan position for a sinusoidally scan.

Figure 28 is a system block diagram showing handling of data to store data in a memory matrix while compensating for nonlinear scan speed of the resonant mirror.

Figure 29 is a block diagram of a first system for generating an output clock to retrieve data from a memory matrix while compensating for nonlinear scan speed of the resonant mirror.

Figure 30 is a block diagram of an alternative embodiment of the apparatus of Figure 29 including pre-distortion.

Figure 31 is a detail block diagram of a clock generation portion of the block diagram of Figure 29.

Figure 32 is a representation of a data structure showing data predistorted to compensate for vertical optical distortion.

Figure 33 is a top plan view of a MEMs scanner including structures for electronically controlling the center of mass of each mirror half.

Figure 34 is a top plan view of the MEMs scanner of Figure 32 showing flexing of protrusions in response to an applied voltage.

Figure 35 is a top plan view of a MEMs scanner including comb structures for laterally shifting the center of mass of each mirror half.

Figure 36 is a side cross sectional view of a packaged scanner including electrically controlled outgassing nodules.

Figure 37 is a top plan view of a MEMs mirror including selectively removable tabs for frequency tuning.

Figure 38 is a diagrammatic view of a four source display showing overlap of scanning fields with optical sources.

Figure 39 is a diagrammatic view of a four source display with small turning mirrors and offset optical sources.

Figure 40 is a diagrammatic view of the display of Figure 39 showing beam paths with the small turning mirrors and a common curved mirror.

Figure 41 is a diagrammatic view of a single emitter display including switched optical fibers each feeding a separate tile.

Figure 42 is a diagrammatic view of a display including four separate fibers feeding a scanner through a set of optical switches in response to a detected gaze direction to produce four separate tiles.

Detailed Description of the Invention

As shown in Figure 6, a scanned beam display 70 according to one embodiment of the invention is positioned for viewing by a viewer's eye 72. While the display 70 is presented herein as scanning light into the eye 72, the structures and concepts described herein can also be applied to other types of displays, such as projection displays that include viewing screens.

The display 70 includes four principal portions, each of which will be described in greater detail below. First, control electronics 74 provide electrical signals that control operation of the display 70 in response to an image signal V_{IM} from an image source 76, such as a computer, television receiver, videocassette player, DVD player, remote sensor, or similar device.

The second portion of the display 70 is a light source 78 that outputs modulated light beams 80, each having a modulation corresponding to information in the image signal V_{IM} . The light source 78 may utilize coherent light emitters, such as laser diodes or microlasers, or may use non-coherent sources such as light emitting diodes. Also, the light source 78 may include directly modulated light emitters such as the light emitting diodes (LEDs) or may include continuous light

emitters indirectly modulated by external modulators, such as acousto-optic modulators.

The third portion of the display 70 is a scanning assembly 82 that scans the modulated beams 80 through two-dimensional scanning patterns, such as raster patterns. The scanning assembly 82 preferably includes a periodically scanning mirror or mirrors as will be described in greater detail below with reference to Figures 3-4, 8, 11, 19-22.

Lenses 84, 86 positioned on opposite sides of the scanning assembly 82 act as imaging optics that form the fourth portion of the display 70. The lenses 86 are cylindrical graded index (GRIN) lenses that gather and shape light from the light source 78. Where the light source 78 includes optical fibers that feed the lenses 86, the lenses 86 may be bonded to or integral to the fibers. Alternatively, other types of lenses, such as doublets or triplets, may form the lenses 86. Also, other types of optical elements such as diffractive elements may be used to shape and guide the light. Regardless of the type of element, the overall optical train may incorporate polarization sensitive materials, chromatic correction, or any other optical technique for controlling the shape, phase or other characteristics of the light.

The lens 84 is formed from a curved, partially transmissive mirror that shapes and focuses the scanned beams 80 approximately for viewing by the eye 72. After leaving the lens 84, the scanned beams 80 enter the eye 72 through a pupil 90 and strike the retina 92. As each beam of scanned modulated light strikes the retina 92, the viewer perceives a respective portion of the image as will be described below.

Because the lens 84 is partially transmissive, the lens 84 combines the light from the scanning assembly 82 with the light received from a background 89 to produce a combined input to the viewer's eye 72. Although the background 89 is presented herein as a "real-world" background, the background light may be occluded or may be produced by another light source of the same or different type.

One skilled in the art will recognize that a variety of other optical elements may replace or supplement the lenses 84, 86. For example, diffractive elements such as Fresnel lenses may replace either or both of the lenses 84, 86. Additionally, a beamsplitter and lens may replace the partially transmissive mirror structure of the lens 84. Moreover, various other optical elements, such as polarizers, color filters, exit pupil expanders, chromatic correction elements, eye-tracking elements, and background masks may also be incorporated for certain applications.

Although the elements of Figure 6 are presented diagrammatically, one skilled in the art will recognize that the components are typically sized and configured for the desired application. For example, where the display 70 is intended as a mobile personal display the components are sized and configured for mounting to a helmet or similar frame as a head-mounted display 70, as shown in Figure 7. In this embodiment, a first portion 171 of the display 70 is mounted to a head-borne frame 174 and a second portion 176 is carried separately, for example in a hip belt. The portions 174, 176 are linked by a fiber optic and electronic tether 178 that carries optical and electronic signals from the second portion to the first portion. An example of a fiber-coupled scanner display is found in U. S. Patent No. 5,596,339 of Furness et al., entitled VIRTUAL RETINAL DISPLAY WITH FIBER OPTIC POINT SOURCE which is incorporated herein by reference.

An exemplary embodiment of the scanning assembly 82 will be described next with reference to Figure 8. The scanning assembly 82 includes several components that correspond to the scanning source 42 of Figure 3, where components common to the scanning assembly 82 and scanning source 42 are numbered the same. Additionally, only central rays 55 are presented for the beams 52 for clarity of presentation.

In this embodiment, a pair of fibers 50 emit light from the light sources 78 (not shown) and the lens 84 is represented as a common refractive lens rather than as a partially transmissive mirror. Unlike the scanning source 42 of Figure 3, the

scanning assembly 82 includes an active correction mirror 100 that can pivot to scan the light beam 80 along the vertical axis. As will be explained below, the correction mirror 100 produces a varying corrective shift along the vertical axis during each sweep (forward or reverse) of the horizontal scanner 56. The corrective shift offsets vertical movement of the beams 80 caused by the vertical scanner 58 to reduce the overall deviation of the scanning pattern from the desired pattern shown in broken lines in Figure 5.

Before describing the effects of the correction mirror 100 and the relative timing of the various signals, exemplary embodiments of mechanically resonant scanner 200, 220 suitable for use as the horizontal scanner 56 and vertical scanner 58 will be described with reference to Figure 9.

The principal scanning component of the horizontal scanner 200 is a moving mirror 202 mounted to a spring plate 204. The dimensions of the mirror 202 and spring plate 204 and the material properties of the spring plate 204 have a high Q with a natural oscillatory (“resonant”) frequency on the order of 1-100 kHz, where the selected resonant frequency depends upon the application. For VGA quality output with a 60 Hz refresh rate and no interlacing, the resonant frequency is preferably about 15-20 kHz. As will be described below, the selected resonant frequency or the achievable resolution may be changed through the use of a plurality of feeds.

A ferromagnetic material mounted with the mirror 202 is driven by a pair of electromagnetic coils 206, 208 to provide motive force to mirror 202, thereby initiating and sustaining oscillation. The ferromagnetic material is preferably integral to the spring plate 204 and body of the mirror 202. Drive electronics 218 provide electrical signals to activate the coils 206, 208, as described above. Responsive to the electrical signals, the coils 206, 208 produce periodic electromagnetic fields that apply force to the ferromagnetic material, thereby causing oscillation of the mirror 202. If the frequency and phase of the electric

signals are properly synchronized with the movement of the mirror 202, the mirror 202 oscillates at its resonant frequency with little power consumption.

The vertical scanner 220 is structured very similarly to the resonant scanner 200. Like the resonant scanner 201, the vertical scanner 220 includes a mirror 222 driven by a pair of coils 224, 226 in response to electrical signals from the drive electronics 218. However, because the rate of oscillation is much lower for vertical scanning, the vertical scanner 220 is typically not resonant. The mirror 222 receives light from the horizontal scanner 201 and produces vertical deflection at about 30-100 Hz. Advantageously, the lower frequency allows the mirror 222 to be significantly larger than the mirror 202, thereby reducing constraints on the positioning of the vertical scanner 220. The details of virtual retinal displays and mechanical resonant scanning are described in greater detail in U.S. Patent No. 5,467,104, of Furness III, et al., entitled VIRTUAL RETINAL DISPLAY which is incorporated herein by reference.

One skilled in the art will recognize a variety of other structures that may scan a light beam through a generally raster pattern. For example, spinning polygons or galvanometric scanners may form either or both of the scanners 56, 58 in some applications.

In another embodiment, a bi-axial microelectromechanical (MEMs) scanner may provide the primary scanning. Such scanners are described in U.S. Patent No. 5,629,790 to Neukermanns et al., entitled MICROMACHINED TORSIONAL SCANNER, which is incorporated herein by reference. Like the scanning system described above, the horizontal components of the MEMs scanners are typically defined by mechanical resonances of their respective structures, as will be described in greater detail below with reference to Figures 17A-B and 21. Like the two scanner system described above with reference to Figures 3 and 8, such biaxial scanners may suffer similar raster pinch problems due to movement along the slower scan axis during sweeps along the faster scan axis. Other scanning approaches may also apply. For example, acousto-optic scanners, electrooptic

scanners, spinning polygons, or some combination of scanning approaches can provide the scanning function. Some of these approaches may not require pinch correction.

Returning to Figures 6, 8 and 9, the fibers 50 output light beams 80 that are modulated according to the image signal from the drive electronics 218. At the same time, the drive electronics 218 activate the coils 206, 208, 224, 226 to oscillate the mirrors 202, 222. The modulated beams of light strike the oscillating horizontal mirror 202 (of the horizontal scanner 56), and are deflected horizontally by an angle corresponding to the instantaneous angle of the mirror 202. The deflected beams then strike the vertical mirror 222 (of the vertical scanner 58) and are deflected at a vertical angle corresponding to the instantaneous angle of the vertical mirror 222. After expansion by the beam expander 62, the beams 52 pass through the lens 84 to the eye. As will also be described below, the modulation of the optical beams is synchronized with the horizontal and vertical scans so that, at each position of the mirrors, the beam color and intensity correspond to a desired virtual image. Each beam therefore “draws” a portion of the virtual image directly upon the user’s retina.

One skilled in the art will recognize that several components of the scanning assembly 82 have been omitted from the Figure 9 for clarity of presentation. For example, the horizontal and vertical scanners 200, 220 are typically mounted to a frame. Additionally, lenses and other optical components for gathering, shaping, turning, focusing, or collimating the beams 80 have been omitted. Also, no relay optics are shown between the scanners 200, 220, although these may be desirable in some embodiments. Moreover, the scanner 200 typically includes one or more turning mirrors that direct the beam such that the beam strikes each of the mirrors a plurality of times to increase the angular range of scanning. Further, in some embodiments, the scanners 200, 220 are oriented such that the beam can strike the scanning mirrors a plurality of times without a turning mirror.

Turning to Figures 10 and 11, the effect of the plurality of beams 80 will now be described. As is visible in Figure 10, two fibers 50 emit respective light beams 80. The GRIN lenses 86 gather and focus the beams 80 such that the beams 80 become converging beams 80A, 80B that strike a common scanning mirror 1090.

For clarity of presentation, the embodiment of Figure 10 eliminates the mirror 84, as is desirable in some applications. Also, the embodiment of Figure 10 includes a single mirror 1090 that scans biaxially instead of the dual mirror structure of Figure 9. Such a biaxial structure is described in greater detail below with reference to Figures 11, 17A-B and 21. One skilled in the art will recognize that a dual mirror system may also be used, though such a system would typically involve a more complex set of ray traces and more complex compensation for differing optical path lengths.

Also, although the fibers 50 and lenses 84 of Figure 10 appear positioned in a common plane with the scanning mirror 1090, in many applications, it may be desirable to position the fibers 50 and lenses 84 off-axis, as is visible in Figure 11. Moreover, where four fiber/lens pairs are used, as in Figure 11, a beam splitter or other optical elements can allow the fiber/lens pairs to be positioned where they do not block beams 80A-D from other fiber/lens pairs. Alternatively, other approaches, such as small turning mirrors can permit repositioning of the fiber/lens pairs in non-blocking positions with little effect on the image quality. Such approaches are described in greater detail below with reference to Figures 11 and 38-40.

After exiting the lens 86, the first beam 80A strikes the scanning mirror 1090 and is reflected toward an image field 1094. The second beam 80B is also reflected by the scanning mirror 1090 toward the image field 1094. As shown by the ray tracing of Figure 10, the horizontal position of the beams 80A-B in the image field 1094 will be functions of the angular deflection from the horizontal scanner 56 and the position and orientation of the lens 86 and fiber 50.

At the image field 1092, the first beam 80A illuminates a first region 1092 of the image field 1094 and the second beam 80B illuminates a second region 1096 that is substantially non-overlapping with respect to the first region 1092. To allow a smooth transition between the two regions 1092, 1096, the two regions 1092, 1096 overlap slightly in a small overlap region 1098. Thus, although the two regions are substantially distinct, the corresponding image portions may be slightly “blended” at the edges, as will be described below with reference to Figures 12 and 13.

While only two beams 80A-B are visible in Figure 10, more than two fiber/lens pairs can be used and the fiber/lens pairs need not be coplanar. For example, as can be seen in Figure 11, four separate lenses 86 transmit four separate beams 80A-D from four spatially separated locations toward the mirror 1090. As shown in Figure 12, the mirror 1090 reflects each of the four beams 80A-D to a respective spatially distinct region 1202A-D of the image field 1094.

Thus, the four beams 80A-D each illuminate four separate “tiles” 1202A-D that together form an entire image. One skilled in the art will recognize that more than four tiles may form the image. For example, adding a third set of fiber/lens pairs could produce a 2-by-3 tile image or a 3-by-2 tile image.

To produce an actual image, the intensity and color content of each of the beams 80A-D is modulated with image information as the mirror 1090 sweeps through a periodic pattern, such as a raster pattern. Figure 13 shows diagrammatically one embodiment where the beams 80A-D can be modulated in response to an image signal V_{im} to produce the four tiles 1202A-D.

The image signal V_{im} drives an A/D converter 1302 that produces corresponding data to drive a demultiplexer 1304. In response to the data and a clock signal CK from the controller 74 (Figure 8), the demultiplexer 1304 produces four output data streams, where each data stream includes data corresponding to a respective image tile 1202A-D. For example, the demultiplexer 1304 outputs data corresponding to the first half of the first line of

the image to a first buffer 1306A and the data corresponding to the second half of the first line to a second buffer 1306B. The demultiplexer 1304 then outputs data corresponding to the second line of the image to the second lines of the first two buffers 1306A, B. After the first two buffers 1306A, B contain data representing the upper half of the image, the demultiplexer 1304 then begins filling third and fourth buffers 1306C, D. Once all of the buffers 1306A-D are full, an output clock CKOUT clocks data simultaneously from all of the buffers 1306A-D to respective D/A converters 1308A-D. The D/A converters 1308A-D then drive respective light sources 78 to produce light that is scanned into the respective regions 2102A-D, as described above. The actual timing of the pixel output is controlled by the output clock CKOUT, as described below with reference to Figures 28-31.

One skilled in the art will recognize that, although the system of Figure 13 is described for four separate regions 1201A-D, a larger or smaller number of regions may be used. Also, where some overlap of the regions 1202A-D is desired, common data can be stored in more than one buffer 1202A-D. Because the sets of common data will duplicate some pixels in the overlapping region, the data may be scaled to limit the intensity to the desired level.

One approach to improving image quality that is helpful in “matching” the image portions 1202A-D to each other will now be described with reference to Figures 14 and 15. Because the angle of the beams 80A-D is determined by the angles of the vertical and horizontal scanner (for the uniaxial, two scanner system) or the horizontal and vertical angles of the single mirror (for the biaxial scanner), the actual vector angle of the beams 80A-D at any point in time can then be determined by vector addition. In most cases, the desired vertical portions of the scan patterns will be a “stair step” scan pattern, as shown by the broken line in Figure 14.

If the turning mirror 100 (Figure 8) is disabled, the pattern traced by the ray will be the same as that described above with respect to Figures 3-5. As represented by the solid line in Figure 14, the actual vertical scan portion of the

pattern, shown in solid line, will be an approximate ramp, rather than the desired stair step pattern.

On approach to providing the stair step pattern would be to drive the vertical scanner 58 with the stair step voltage. However, because the vertical mirror is a physical system and the stair step involves discontinuous motion, the vertical mirror will not follow the drive signal exactly. Instead, as the vertical mirror attempts to follow the stair step pattern, the vertical mirror will move at a maximum rate indicated largely by the size and weight of the vertical mirror, the material properties of the mirror support structure, the peak voltage or current of the driving signal, and electrical properties of the driving circuitry. For typical vertical scan mirror size, configuration, scan angle and driving voltage, the vertical scanner 58 is limited to frequencies on the order of 100 to 3000 Hz. The desired scan pattern has frequency components far exceeding this range. Consequently, driving the vertical scanner 58 with a stair step driving signal can produce a vertical scan pattern that deviates significantly from the desired pattern.

To reduce this problem, the scanning assembly 82 of Figure 8 separates the vertical scan function into two parts. The overall vertical scan is then a combination of a large amplitude ramp function at about 60 Hz and a small amplitude correction function at twice the horizontal rate (e.g., about 30kHz). The vertical scanner 58 can produce the large amplitude ramp function, because the 60 Hz frequency is well below the upper frequency limit of typical scanning mirrors. Correction mirrors 100 replace the turning mirrors 100 and provide the small amplitude corrections. The correction mirrors 100 operate at a much higher frequency than the vertical scanner; however, the overall angular swings of the correction mirrors 100 are very small.

As can be seen from the signal timing diagram of Figure 15, the correction mirror 100 travels from approximately its maximum negative angle to its maximum positive angle during the time that the horizontal scanner scans from the one edge of the field of view to the opposite edge (i.e. from time t_1 to t_2 in Figure

15). The overall correction angle, as shown in Figures 14 and 15, is defined by the amount of downward travel of the vertical scan mirror during a single horizontal scan. The correction angle will vary for various configurations of the display; however, the correction angle can be calculated easily.

For example, for a display where each image region 1202A-D has 1280 vertical lines and a total mechanical vertical scan angle of 10 degrees, the angular scan range for each line is about 0.008 degrees ($10/1280 = 0.0078125$). Assuming the vertical scanner 58 travels this entire distance during the horizontal scan, an error correction to be supplied by the correction mirror 100 is about plus or minus 0.0039 degrees. The angular correction is thus approximately θ/N , where θ is the vertical scan angle and N is the number of horizontal lines. This number may be modified in some embodiments. For example, where the horizontal scanner 56 is a resonant scanner, the correction angle may be slightly different, because the horizontal scanner 56 will use some portion of the scan time to halt and begin travel in the reverse direction, as the scan reaches the edge of the field of view. The correction angle may also be modified to correct for aberrations in optical elements or optical path length differences. Moreover, the frequency of the correction scanner 100 may be reduced by half if data is provided only during one half of the horizontal scanner period ("unidirectional scanning"), although raster pinch is typically not problematic in unidirectional scanning approaches.

As can be seen from the timing diagrams of Figures 14 and 15, the correction mirror 100 will translate the beam vertically by about one half of one line width at a frequency of twice that of the horizontal scanner 56. For a typical display at SVGA image quality with bi-directional scanning (i.e., data output on both the forward and reverse sweeps of the horizontal scanner 56), the horizontal scanner 56 will resonate at about 15 kHz. Thus, for a typical display, the correction scanner 100 will pivot by about one-tenth of one degree at about 30 kHz. One skilled in the art will recognize that, as the resolution of the display increases, the scan rate of the horizontal scanner 56 increases. The scan rate of the

correction mirror 100 will increase accordingly; but, the pivot angle will decrease. For example, for a display having 2560 lines and an overall scan of 10 degrees, the scan rate of the correction mirror 100 will be about 60 kHz with a pivot angle of about 0.002 degrees. One skilled in the art will recognize that, for higher resolution, the minimum correction mirror size will typically increase where the spot size is diffraction limited.

Figure 16 shows a piezoelectric scanner 110 suitable for the correction mirror 100 in some embodiments. The scanner 110 is formed from a platform 112 that carries a pair of spaced-apart piezoelectric actuators 114, 116. The correction mirror 100 is a metallized, substantially planar silicon substrate that extends between the actuators 114, 116. The opposite sides of the piezoelectric actuators 114, 116 are conductively coated and coupled to a drive amplifier 120 such that the voltage across the actuators 114, 116 are opposite. As is known, piezoelectric materials deform in the presence of electric fields. Consequently, when the drive amplifier 120 outputs a voltage, the actuators 114, 116 apply forces in opposite directions to the correction mirror 100, thereby causing the correction mirror 100 to pivot. One skilled in the art will recognize that, although the piezoelectric actuators 114, 116 are presented as having a single set of electrodes and a single layer of piezoelectric material, the actuators 114, 116 would typically be formed from several layers. Such structures are used in commercially available piezoelectric devices to produce relatively large deformations.

A simple signal generator circuit 122, such as a conventional ramp generator circuit, provides the driving signal for the drive amplifier 120 in response to the detected position of the horizontal scanner 56. The principal input to the circuit 122 is a sense signal from a sensor coupled to the horizontal scanner 56. The sense signal can be obtained in a variety of approaches. For example, as described in U. S. Patent No. 5,648,618 to Neukermanns et al., entitled MICROMACHINED HINGE HAVING AN INTEGRAL TORSIONAL SENSOR, which is incorporated herein by reference, torsional movement of a

MEMs scanner can produce electrical outputs corresponding to the position of the scanning mirror. Alternatively, the position of the mirror may be obtained by mounting piezoelectric sensors to the scanner, as described in U. S. Patent No. 5,694,237 to Melville, entitled POSITION DETECTION OF MECHANICAL RESONANT SCANNER MIRROR, which is incorporated herein by reference. In other alternatives, the position of the beam can be determined by optically or electrically monitoring the position of the horizontal or vertical scanning mirrors or by monitoring current induced in the mirror drive coils.

When the sense signal indicates that the horizontal scanner 56 is at the edge of the field of view, the circuit 122 generates a ramp signal that begins at its negative maximum and reaches its zero crossing point when the horizontal scanner reaches the middle of the field of view. The ramp signal then reaches its maximum value when the horizontal scan reaches the opposite edge of the field of view. The ramp signal returns to its negative maximum during the interval when the horizontal scan slows to a halt and begins to return sweep. Because the circuit 122 can use the sense signal as the basic clock signal for the ramp signal, timing of the ramp signal is inherently synchronized to the horizontal position of the scan. However, one skilled in the art will recognize that, for some embodiments, a controlled phase shift of the ramp signal relative to the sense signal may optimize performance. Where the correction mirror 100 is scanned resonantly, as described below with reference to Figure 18, the ramp signal can be replaced by a sinusoidal signal, that can be obtained simply by frequency doubling, amplifying and phase shifting the sense signal.

The vertical movements of the beams 80A-D induced by the correction mirrors 100 offset the movement of the beams 80A-D caused by the vertical scanner 58, so that the beams 80A-D remain stationary along the vertical axis during the horizontal scan. During the time the horizontal scan is out of the field of view, the beams 80A-D travel vertically in response to the correction mirrors 100 to the nominal positions of the next horizontal scan.

As can be seen from the above discussion, the addition of the piezoelectrically driven correction mirrors 100 can reduce the raster pinching significantly with a ramp-type of motion. However, in some applications, it may be undesirable to utilize ramp-type motion. One alternative embodiment of a scanner 130 that can be used for the correction mirror 100 is shown in Figures 17A and 17B.

The scanner 130 is a resonant micromechanical (MEMs) scanner, fabricated similarly to the uniaxial embodiment described in the Neukermanns '790 patent. Alternatively, the scanner 130 can be a mechanically resonant scanner very similar to the horizontal scanner 54 of Figure 9; however, in such a scanner it is preferred that the dimensions and material properties of the plate and mirror be selected to produce resonance at about 30 kHz, which is twice the resonant frequency of the horizontal scanner 200. Further, the materials and mounting are preferably selected so that the scanner 130 has a lower Q than the Q of the horizontal scanner 56. The lower Q allows the scanner 130 to operate over a broader range of frequencies, so that the scanner 130 can be tuned to an integral multiple of the horizontal scan frequency.

The use of the resonant scanner 130 can reduce the complexity of the electrical components for driving the scanner 130 and can improve the scanning efficiency relative to previously described approaches. Resonant scanners tend to have a sinusoidal motion, rather than the desired ramp-type motion described above. However, if the frequency, phase, and amplitude of the sinusoidal motion are selected appropriately, the correction mirror 100 can reduce the pinch error significantly. For example, Figure 18 shows correction of the raster signal with a sinusoidal motion of the correction mirror where the horizontal field of view encompasses 90 percent of the overall horizontal scan angle. One skilled in the art will recognize that the error in position of the beam can be reduced further if the field of view is a smaller percentage of the overall horizontal scan angle. Moreover, even further reductions in the scan error can be realized by adding a

second correction mirror in the beam path, although this is generally undesirable due to the limited improvement versus cost. Another approach to reducing the error is to add one or more higher order harmonics to the scanner drive signal so that the scanning pattern of the resonant correction scanner 130 shifts from a sinusoidal scan closer to a sawtooth wave.

Another alternative embodiment of a reduced error scanner 140 is shown in Figure 19 where the scan correction is realized by adding a vertical component to a horizontal mirror 141. In this embodiment, the horizontal scanner 140 is a MEMs scanner having an electrostatic drive to pivot the scan mirror. The horizontal scanner 140 includes an array of locations 143 at which small masses 145 may be formed. The masses 145 may be deposited metal or other material that is formed in a conventional manner, such as photolithography. Selected ones of the masses 143 are removed to form an asymmetric distribution about a centerline 147 of the mirror 141. The masses 145 provide a component to scan the correction along the vertical axis by pivoting about an axis orthogonal to its primary axis. As can be seen in Figure 20, the vertical scan frequency is double the horizontal scan frequency, thereby producing the Lissajous or “bow-tie” overall scan pattern of Figure 20. The masses 145 may be actively varied (e.g. by laser ablation) to tune the resonant frequency of the vertical component. This embodiment allows correction without an additional mirror, but typically requires matching the resonant frequencies of the vibration and the horizontal scanner.

To maintain matching of the relative resonant frequencies of the horizontal scanner 56 and the correction scanner 100, the resonant frequency of either or both scanners 56, 100 may be tuned actively. Various frequency control techniques are described below with reference to Figures 33-36. Where the Q of the scanners 56, 100 are sufficiently low or where the scanners 56, 100 are not resonant, simply varying the driving frequency may shift the scanning frequency sufficiently to maintain synchronization.

As shown in Figure 21, another embodiment of a scanner 150 according to the invention employs a biaxial scanner 152 as the principal scan component, along with a correction scanner 154. The biaxial scanner 152 is a single mirror device that oscillates about two orthogonal axes. Design, fabrication and operation of such scanners are described for example in the Neukermanns '790 patent, in Asada, et al, Silicon Micromachined Two-Dimensional Galvano Optical Scanner, IEEE Transactions on Magnetics, Vol. 30, No. 6, 4647-4649, November 1994, and in Kiang et al, Micromachined Microscanners for Optical Scanning, SPIE proceedings on Miniaturized Systems with Micro-Optics and Micromachines II, Vol. 3008, Feb. 1997, pp. 82-90 each of which is incorporated herein by reference. The bi-axial scanner 152 includes integral sensors 156 that provide electrical feedback of the mirror position to terminals 158, as is described in the Neukermanns '618 patent.

The correction scanner 154 is preferably a MEMs scanner such as that described above with reference to Figures 17A-B, although other types of scanners, such as piezoelectric scanners may also be within the scope of the invention. As described above, the correction mirror 154 can scan sinusoidally to remove a significant portion of the scan error; or, the correction mirror can scan in a ramp pattern for more precise error correction.

Light from the light source 78 strikes the correction mirror 154 and is deflected by a correction angle as described above. The light then strikes the biaxial scanner 152 and is scanned horizontally and vertically to approximate a raster pattern, as described above with reference to Figures 3-5.

Another embodiment of a display according to the invention, shown in Figure 23, eliminates the correction mirror 100 by physically shifting the input beam laterally relative to the input of an optical system 500. In the embodiment of Figure 23, a piezoelectric driver 502 positioned between a frame 504 and an input fiber 506 receives a drive voltage at a frequency twice that of the horizontal scan frequency. Responsive to the drive voltage, the piezoelectric driver 502 deforms.

Because the fiber 506 is bonded to the piezoelectric driver 502, deformation of the piezoelectric driver 502 produces corresponding shifting of the fiber 506 as indicated by the arrow 508 and shadowed fiber 510. One skilled in the art will recognize that, depending upon the characteristics of the optical system 500, the piezoelectric driver 502 may produce lateral translation of the fiber 506 or angular shifting of the fiber 506 output. The optical system 500 then translates movement of the fiber output into movement of the perceived pixel location as in the previously described embodiments. While the embodiment of Figure 23 translates a fiber, the invention is not so limited. For example some applications may incorporate translation of other sources, such as LEDs or laser diodes, may translate the position of the lens 50, or may translate or rotate an entire scanner, such as a biaxial MEMs scanner.

Although the embodiment of Figure 23 shifts the input beam by shifting the position of the input fiber, other methods of shifting the input beam may be within the scope of the invention. For example, as shown in Figure 24, an electro-optic crystal 300 shifts the input beam 83 in response to an electrical signal. In this embodiment, the beam 83 enters a first face 302 of a trapezoidally shaped electro-optic crystal 300, where refraction causes a shift in the direction of propagation. When the beam 83 exits through a second face 304, refraction produces a second shift in the direction of propagation. At each face, the amount of changes in the direction or propagation will depend upon difference in index of refraction between the air and the crystal 300.

As is known, the index of refraction of electro-optical crystals is dependent upon the electric field through the crystal. A voltage applied across the crystal 300 through a pair of electrodes 306 can control the index of refraction of the crystal 300. Thus, the applied voltage can control the index of refraction of the crystal 300. Thus the applied voltage can control the angular shift of the beam 83 as it enters and exits the crystal 300 as indicated by the broken line 83a. The amount of shift will correspond to the applied voltage. Accordingly, the amount

of shift can be controlled by controlling the voltage applied to the electrodes 306. The crystal 300 thus provides a voltage controlled beam shifter that can offset raster pinch.

Although the embodiments described herein have been displays, other devices or methods may be within the scope of the invention. For example, as shown in Figure 24, an imager 600 includes a biaxial scanner 602 and correction scanner 604 that are very similar to the scanners 152, 154 of Figure 21. The imager 600 is an image collecting device that may be the input element of a digital camera, bar code reader, two dimensional symbol reader, document scanner, or other image acquisition device. To allow the imager 600 to gather light efficiently, the imager 600 includes gathering optics 606 that collect and transmit light from a target object 608 outside of the imager 600 onto the correction scanner 604. The gathering optics 606 are configured to have a depth of field, focal length, field of view and other optical characteristics appropriate for the particular application. For example, where the imager 600 is a two dimensional symbology reader, the gathering optics 606 may be optimized for red or infrared light and the focal length may be on the order of 10-50cm. For reading symbols at a greater distance, the focusing optics may have longer focusing distance or may have a variable focus. The optics may be positioned at other locations along the optical path to allow smaller, cheaper components to be used.

The correction scanner 604 redirects light received from the gathering optics 606 as described above for the display embodiments, so that the gathered light has a correction component before it reaches the biaxial scanner 602. The biaxial scanner 602 scans through a generally raster pattern to collect light arriving at the gathering optics 606 from a range of angles and to redirect the light onto a group of stationary photodetectors 610, each positioned at a respective location and orientation, such that it images a respective "tile" of the image field.

Movement of the biaxial scanner 602 thus translates to imaging successive points of the target object 608 onto the photodetectors 610. The photodetectors

variety of known optical techniques. One skilled in the art will recognize that, although figure 24 shows the correction scanner 604 positioned after the horizontal scanner 602, it will often be preferable to position the correction scanner 604 between the beam splitter 616 and the horizontal scanner 602. This allows for the mirror of the correction scanner 604 to be made small.

Alternatively, the photodetectors 610 may be mounted externally to the scanners 602, 604 and oriented to capture light directly from their respective tiles. Because each photodetector 610 is wavelength matched to its respective source and because the photodetectors 610 are aligned to spatially distinct regions, crosstalk between signals from the respective tiles may be adequately suppressed.

In one application of the imager 600 of Figure 24, one or more of the illumination sources 614 includes a visible, directly modulated light source, such as a red laser diode or a visible wavelength light emitted diode (LED). As shown in Figure 25, the visible illumination source 614 can thus produce a visible image for the user. In the exemplary embodiment of Figure 25, the imager can operate as a symbology scanner to identify information contained in a symbol on the target object 608. Once the decoding electronics 612 identifies a desired image to be viewed, such as an item price and identity, the decoding electronics 612 modulates the drive current of the illumination sources 614 to modulate the intensity of the emitted light according to the desired image. When the user directs the imager 600 toward a screen 619 (or the target object), the illuminating light is scanned onto the screen 619 as described above. Because the illuminating light is modulated according to the desired image, the visible light reflected from the screen 619 is spatially modulated according to the desired image. The imager 600 thus acts as an image projector in addition to acquiring image data. In addition to, or as an alternative to, modulating the diode to produce an image, the diodes corresponding to each of the regions of the target object 608 may also output continuous or pulsed beams of light that fill the entire field of view of the imager 600. The imager 600 thus provides a spotter frame 618 that indicates the field of

view to the user. Similarly, the illumination sources 614 can be modified to outline the field of view or to produce other indicia of the field of view, such as cross hatching or fiducials, to aid the user in aligning the imager 600 to the target object 608.

In addition to compensating for raster pinch, one embodiment of the scanning system, shown in Figure 28, also addresses effects of the nonlinearity of resonant and other nonlinear scanning systems. One skilled in the art will recognize that, although this correction is described for a single light source or single detector system, the approaches described herein are applicable to systems using more than one light source, as presented in Figure 10 above. For example, in one application, the corrected output clock signal described below with reference to Figure 28, drives all of the buffers 1306A-D (Figure 13) to output data in parallel from buffers 1306A-D.

As shown by broken line in Figure 26, the timing of incoming data is premised upon a linear scan rate. That is, for equally spaced subsequent locations in a line, the data arrive at constant intervals. A resonant scanner, however, has a scan rate that varies sinusoidally, as indicated by the solid line in Figure 26. For a start of line beginning at time t_0 (note that the actual start of scan for a sinusoidal scan would likely be delayed slightly as described above with respect to Figure 26), the sinusoidal scan initially lags the linear scan. Thus, if the image data for position P_1 arrive at time t_{1A} , the sinusoidal scan will place the pixel at position P_2 .

To place the pixel correctly, the system of Figure 28 delays the image data until time t_{1B} , as will now be described. As shown in Figure 28, arriving image data V_{IM} are clocked into a line or frame buffer 2200 by a counter circuit 2202 in response to a horizontal synchronization component of the image data signal. The counter circuit 2202 is a conventional type circuit, and provides an input clock signal having equally spaced pulses to clock the data into the buffer 2200. In the multisource system of Figure 13, the four buffers 1306A-D, and demultiplexer 1304 replace the frame buffer and the image data are clocked sequentially through

the demultiplexer 1304 into the four buffers 1306A-D, rather than being clocked into a single frame buffer or line buffer.

A feedback circuit 2204 controls timing of output from the buffer 2200 (or buffers 1306A-D of Figure 13). The feedback circuit 2204 receives a sinusoidal or other sense signal from the scanning assembly 82 and divides the period of the sense signal with a high-speed second counter 2206. A logic circuit 2208 produces an output clock signal in response to the counter output.

Unlike the input clock signal, however, pulses of the output clock signal are not equally spaced. Instead, the pulse timing is determined analytically by comparing the timing of the linear signal of Figure 26 to the sinusoidal signal. For example, for a pixel to be located at position P_1 , the logic circuit 2208 provides an output pulse at time t_{1B} , rather than time t_{1A} , as would be the case for a linear scan rate.

The logic circuit 2208 identifies the count corresponding to a pixel location by accessing a look-up table in a memory 2210. Data in the look-up table 2210 are defined by dividing the scanning system period into many counts and identifying the count corresponding to the proper pixel location. Figure 27 shows this evaluation graphically for a 35-pixel line. One skilled in the art will recognize that this example is simplified for clarity of presentation. A typical line may include hundreds or even thousands of pixels. As can be seen, the pixels will be spaced undesirably close together at the edges of the field of view and undesirably far apart at the center of the field of view. Consequently, the image will be compressed near the edges of the field of view and expanded near the middle, thereby forming a distorted image.

As shown by the upper line, pixel location varies nonlinearly for pixel counts equally spaced in time. Accordingly, the desired locations of each of the pixels, shown by the upper line, actually correspond to nonlinearly spaced counts. For example, the first pixel in the upper and lower lines arrives at the zero count and should be located in the zero count location. The second pixel arrives at the

100 count, but, should be positioned at the 540 count location. Similarly, the third pixel arrives at count 200 and is output at count 720. One skilled in the art will recognize that the figure is merely representative of the actual calculation and timing. For example, some output counts will be higher than their corresponding input counts and some counts will be lower. Of course, a pixel will not actually be output before its corresponding data arrives. To address this condition, the system of Figure 28 actually imposes a latency on the output of data, in a similar fashion to synchronous memory devices. For the example of Figure 27, a single line latency (3400 count latency) would be ample. With such a latency, the first output pixel would occur at count 3400 and the second would occur at count 3940.

Figure 29 shows an alternative approach to placing the pixels in the desired locations. This embodiment produces a corrected clock from a pattern generator rather than a counter to control clocking of output data. A synch signal stripper 2500 strips the horizontal synchronization signal from an arriving image signal V_{IM} . Responsive to the synch signal, a phase locked loop 2502 produces a series of clock pulses that are locked to the synch signal. An A/D converter 2504, driven by the clock pulses, samples the video portion of the image signal to produce sampled input data. The sampling rate will depend upon the required resolution of the system. In the preferred embodiment, the sampling rate is approximately 40 Mhz. A programmable gate array 2506 conditions the data from the A/D converter 2504 to produce a set of image data that are stored in a buffer 2508. One skilled in the art will recognize that, for each horizontal synch signal, the buffer will receive one line of image data. For a 1480 x 1024 pixel display, the system will sample and store 1480 sets of image data during a single period of the video signal.

Once each line of data is stored in the buffer 2508, the buffer is clocked to output the data to a RAMDAC 2509 that includes a gamma correction memory 2510 containing corrected data. Instead of using the buffer data as a data input to the gamma correction memory 2510, the buffer data is used to produce addressing

data to retrieve the corrected data from the gamma correction memory 2510. For example, a set of image data corresponding to a selected image intensity I_1 identifies a corresponding location in the gamma correction memory 2510. Rather than output the actual image data, the gamma correction memory 2510 outputs a set of corrected data that will produce the proper light intensity at the user's eye. The corrected data is determined analytically and empirically by characterizing the overall scanning system, including the transmissivity of various components, the intensity versus current response of the light source, diffractive and aperture effects of the components and a variety of other system characteristics.

In one embodiment shown in Figure 30 according to the invention, the data may be corrected further for temperature-versus-intensity or age-versus-intensity variations of the light source. Reference data drives the light source while the vertical and horizontal position is out of the user's field of view. For example, at the edge of the horizontal scan, the reference data is set to a predetermined light intensity. A detector 2519 monitors the power out of the light source 2516 and a temperature compensation circuit 2521. If the intensity is higher than the predetermined light intensity, a gain circuit 2523 scales the signal from the RAMDAC 2506 by a correction factor that is less than one. If the intensity is higher than the predetermined light intensity, the correction factor is greater than one. While the embodiments described herein pick off a portion of the unmodulated beam or sample the beam during non-display portions of the scanning period, the invention is not so limited. For example, a portion of the modulated beam can be picked off during the display portion of the scanning period or continuously. The intensity of the picked off portion of the modulated beam is then scaled and compared to the input video signal to determine shifts in the relative intensity of the displayed light versus the desired level of the displayed light to monitor variations.

In addition to monitoring the intensity, the system can also compensate for pattern dependent heating through the same correction data or by multiplying by a

second correction factor. For example, where the displayed pattern includes a large area of high light intensity, the light source temperature will increase due to the extended period of high level activation. Because data corresponding to the image signal is stored in a buffer, the data is available prior to the actual activation of the light source 2516. Accordingly, the system can “look-ahead” to predict the amount of heating produced by the pattern. For example, if the light source will be highly activated for the 50 pixels preceding the target pixel, the system can predict an approximate pattern dependent heat effect. The correction factor can then be calculated based upon the predicted pattern dependent heating. Although the correction has been described herein for the intensity generally, the correction in many embodiments can be applied independently for red, green and blue wavelengths to compensate for different responses of the emitters and for variations in pattern colors. Compensating for each wavelength independently can help limit color imbalance due to differing variations in the signal to intensity responses of the light emitters.

Returning to Figure 29, the corrected data output from the gamma correction memory 2510 (as it may be modified for intensity variations) drives a signal shaping circuit 2514 that amplifies and processes the corrected analog signal to produce an input signal to a light source 2516. In response, the light source 2516 outputs light modulated according to the corrected data from the gamma correction memory 2510. The modulated light enters a scanner 2518 to produce scanned, modulated light for viewing.

The clock signal that drives the buffer 2508, correction memory 2510, and D/A converter 2512 comes from a corrected clock circuit 2520 that includes a clock generator 2522, pattern memory 2524 and rising edge detector 2526. The clock generator 2522 includes a phase locked loop (PLL) that is locked to a sense signal from the scanner 2518. The PLL generates a high frequency clock signal at about 80 MHz that is locked to the sense signal. The high frequency clock signal clocks data sequentially from addresses in the pattern memory 2524.

The rising edge detector 2526 outputs a pulse in response to each 0-to-1 transition of the data retrieved from the pattern memory 2524. The pulses then form the clock signal CKOUT that drives the buffer output, gamma correction memory 2510, and D/A converter 2512.

One skilled in the art will recognize that the timing of pulses output from the edge detector 2526 will depend upon the data stored in the pattern memory 2524 and upon the scanning frequency f_{SCAN} of the scanner 2518. Figure 31 shows a simplified example of the concept. One skilled in the art will recognize that, in Figure 31, the data structure is simplified and addressing and other circuitry have also been omitted for clarity of presentation.

In the example of Figure 31, if the scanning frequency f_{SCAN} is 20 kHz and clock generator 2522 outputs a clock signal at 4000 times the scanning frequency f_{SCAN} , the pattern memory 2524 is clocked at 80 MHz. If all bits in an addressed memory location 2524A are 0, no transitions of the output clock occur for 16 transitions of the generator clock. For the data structure of location 2524B, a single transition of the output clock occurs for 16 transitions of the generator clock. Similarly, location 2524C provides two pulses of the generator clock in one period of the scan signal and location 2524E provides eight pulses of the generator clock in one period.

The number and relative timing of the pulses is thus controlled by the data stored in the pattern memory 2524. The frequency of the generator clock on the other hand depends upon the scanner frequency. As the scanner frequency varies, the timing of the pulses thus will vary, yet will depend upon the stored data in the pattern memory.

The approaches of Figures 29 and 30 are not limited to sinusoidal rate variation correction. The clock pattern memory 2524 can be programmed to address many other kinds of nonlinear effects, such as optical distortion, secondary harmonics, and response time idiosyncrasies of the electronic and optical source.

Moreover, the basic structure of Figure 29 can be modified easily to adapt for vertical scanning errors or optical distortion, by inserting a bit counter 2530, look up table 2532, and vertical incrementing circuit 2534 before the buffer 2508, as shown in Figure 30. The counter 2530 addresses the look up table 2532 in response to each pulse of the input clock to retrieve two bits of stored data. The retrieved data indicate whether the vertical address should be incremented, decremented or left unaffected. The data in the look up table 2532 is determined empirically by measuring optical distortion of the scanning system and optics or is determined analytically through modeling. If the address is to be incremented or decremented, the incrementing circuit increments or decrements the address in the buffer 2508, so that data that was to be stored in a nominal memory location are actually stored in an alternate location that is one row higher or lower than the nominal location.

A graphical representation of one such data structure is shown in the simplified example Figure 32. In this example, the first three sets of data bits 3202 for the first line of data (line 0) are stored in the first memory row, the next three sets of data bits 3204 for the first line are stored in the second memory row, and the last three sets of data bits are stored in the third memory row. One skilled in the art will recognize that this example has been greatly simplified for clarity of presentation. An actual implementation would include many more sets of data and may utilize decrementing of the row number as well as incrementing.

The result is that some portion of the data for one line is moved to a new line. The resulting data map in the buffer 2508 is thus distorted as can be seen from Figure 32. However, distortion of the data map can be selected to offset vertical distortion of the image caused by scanning and optical distortion. The result is that the overall system distortion is reduced. Although the embodiment of Figure 30 shows correction of vertical distortion by adjusting the position of data stored in the buffer 2508, other approaches to this correction may be implemented. For example, rather than adjusting the addresses of the storage locations, the

addresses used for retrieving data from the buffer 2508 to the RAMDAC 2509 can be modified.

As noted above, in many applications, it is desirable to control the scanning frequencies of one or more scanners. In non-resonant or low Q applications, simply varying the frequency of the driving signal can vary the scanning frequency. However, in high Q resonant applications, the amplitude response of the scanners may drop off dramatically if the driving signal differs from the resonant frequency of the scanner. Varying the amplitude of the driving signal can compensate somewhat, but the magnitude of the driving signal may become unacceptably high in many cases. Consequently, it is undesirable in many applications to try to control the scanner frequency f_{SCAN} simply by controlling the driving signal frequency and/or amplitude.

One approach to controlling the frequency f_{SCAN} is shown in Figures 33 and 34 for a MEMs scanner 3300. The scanner 3300 includes four tuning tabs 3302A-D positioned at corners of a mirror body 3304. The tuning tabs 3302A-D are flexible projections that are integral to the mirror body 3304. Fixed rigid projections 3305 project from the mirror body 3304 adjacent to the tuning tabs 3302A-D, leaving a small gap therebetween.

Each of the tuning tabs 3302A-D carries a ground electrode 3306 coupled by a conductor 3310 to an external electrode 3312 to form an electrical reference plane adjacent to the respective tab 3302A-D. Each of the rigid projections 3306A-D carries a respective hot electrode 3308 controlled by a respective external electrode 3316A-D, that allows control of the voltage difference between each tuning tab 3302A-D and its corresponding rigid projection 3306A-D.

Each flexible tab 3302A-D is dimensioned so that it bends in response to an applied voltage difference between the tab 3302A-D and the adjacent rigid projection 3306, as shown in Figure 34. The amount of bending will depend upon the applied voltage, thereby allowing electrical control of tuning tab bending.

One skilled in the art will recognize that the resonant frequency of the scanner 3300 will be a function of the mass of the mirror 3304, the dimensions and mechanical properties of torsion arms 3317 supporting the mirror 3304, and the locations 3318 of the centers of mass of each half of the mirror 3304 (including its tabs 3302A-D and rigid projections 3306) relative to the axis of rotation of the mirror 3304. Bending the flexible tabs shifts the centers of mass slightly inwardly from the original locations 3318 to new locations 3320. Because the centers of mass are located closer to the axis of rotation, the scanning frequency increases slightly. Increasing the voltage on the fixed projections 3306 thus can increase the resonant frequency of the scanner 3300.

The use of electronically controlled elements to control resonance in a scanner is not limited to controlling the horizontal scanning frequency. For example, in the embodiment of Figure 35, a mirror body 3500 has interdigitated comb drives 3502 that extend from the body's edges. Comb driven actuators are known structures, being described for example in Tang, et al., ELECTROSTATIC-COMB DRIVE OF LATERAL POLYSILICON RESONATORS, Transducers '89, Proceedings of the 5th International Conference on Solid State Sensors and Actuators and Eurosensors III, Vol. 2, pp. 328-331, June 1990, which is incorporated herein by reference.

Respective conductors 3504 extend from each of the comb drives 3502 to allow tuning voltages V_{tune1} , V_{tune2} to control the comb drives 3502. As is known, applied voltages produces lateral forces F_1 , F_2 in the comb drives 3502. Flexible arms 3506 at the distal ends of the comb drives 3502 bend in response to the forces F_1 , F_2 , thereby shifting the mass of the flexible arms 3506 relative to the center of mass 3508 of the respective half of the mirror body. Because the position shift is parallel to the axis of rotation of the mirror body 3500, the horizontal resonant frequency does not shift significantly. However, if the voltages are set such that the flexible arms experience different position shifts, the mirror body 3500 can be made slightly unbalanced. The mirror body 3500 will

then begin to approximate the Lissajous pattern of Figure 20. Adjusting the tuning voltages V_{tune1} , V_{tune2} produces a corresponding adjustment in the scan pattern. Where the masses of the flexible portions 3506 and the voltages V_{tune1} , V_{tune2} are chosen appropriately, the resonant frequency of vibrations from the unbalanced mirror body will be an integral multiple of the horizontal scanning frequency and the Lissajous pattern will be stable. By monitoring the scan pattern and adjusting the tuning voltages V_{tune1} , V_{tune2} accordingly, the Lissajous pattern can be kept stable. Thus, the electronically controlled structures can assist in pinch correction.

Figure 36 shows an alternative approach to controlling the resonant frequency of a scanner 3600. In this embodiment, the scanner 3600 is housed on a platform 3602 in a sealed package 3604 having a transparent lid 3606. The package 3604 also contains a gas, such as a helium or argon mix, at a low pressure. The resonant frequency of the scanner 3600 will depend, in part, upon the pressure of within the package 3602 and the properties of the gas, as is described in Baltes et. al., THE ELECTRONIC NOSE IN LILLIPUT, IEEE Spectrum, Sept. 1998, pp. 35-39, which is incorporated here: by reference. Unlike conventional sealed packages, the package 3602 includes a pair of outgassing nodules 3610 concealed beneath the platform 3602.

The nodules 3610 are formed from an outgassing material, such as isopropanol in a polymer, atop a resistive heater 3611. Electrical current causes resistive heating of the heater 3611, which, in turn causes the nodule 3610 to outgas. An electronic frequency controller 3614, controls the amount of outgassing by applying a controlled current through pairs of electrodes 3612 positioned on opposite sides of each of the nodules 3610. The increased gas concentration reduces the resonant frequency of the scanner 3600. For greater frequency variation, absorptive polymer segments 3618 coat the scanners torsion arms 3620 to “amplify” the absorptive effect on resonant frequency.

Typically, the above-described variable or “active” tuning approaches are most desirable for producing small frequency variations. For example, such small frequency adjustments can compensate for resonant frequency drift due to environmental effects, aging, or internal heat buildup. To reduce the difficulty of active tuning approaches or to eliminate active tuning entirely, it is desirable in many applications to “tune” the resonant frequency of a scanner to minimize the difference between the scanner’s uncompensated resonant frequency and the desired scan frequency. Such frequency differences may be caused by processing variations, material property variations, or several other effects.

Figure 37 shows one approach to tuning the scanner’s uncompensated resonant frequency, in which a scanner 3700 is fabricated with integral tuning tabs 3702A-B, 3704A-B, 3706A-B, 3708A-B, 3710, and 3712. Initially, the scanner’s mirror body 3714 and torsional arms 3716 are dimensioned to produce a resonant frequency (with all of the tuning tabs 3702A-B, 3704A-B, 3706A-B, 3708A-B, 3710, and 3712 attached) that is slightly below the desired resonant frequency. Once the scanner 3700 is assembled, the resonant frequency can be measured in a variety of fashions. For example, the scanner 3700 can be driven in one of the techniques described previously and the mirror response can be monitored optically. Alternatively, impedance versus frequency measurements may also provide the resonant frequency relatively quickly.

The determined resonant frequency is then compared to the desired resonant frequency to identify a desired frequency compensation. Based upon the identified frequency compensation some of the tuning tabs 3702A-B, 3704A-B, 3706A-B, 3708A-B, 3710, and 3712 can be removed, for example by laser trimming or mechanical force to reduce the mass of the mirror body 3714. As is known, lowering the mass of the mirror body 3714 (in the absence of other variations) will increase the resonant frequency. The number and position of the tabs to be removed for the identified frequency compensation can be determined through modeling or empirical data. Preferably, the removed tuning tabs are

positioned symmetrically relative to the center of mass of the respective half of the mirror body and with respect to the axis of rotation of the mirror body 3714. To make this symmetry easier, the tuning tabs 3702A-B, 3704A-B, 3706A-B, 3708A-B, 3710, and 3712 are positioned in the symmetric locations about the mirror body 3714. For example, tuning tabs 3702A-B and 3704A-B form a quartet of tabs that would typically be removed as a group. Similarly, tuning tabs 3710 and 3712 form a pair of tabs that would typically be removed as a pair.

While the tuning tabs 3702A-B, 3704A-B, 3706A-B, 3708A-B, 3710, and 3712 in Figure 37 are shown as equally sized for ease of presentation, it is not always necessary or even desirable to make them the same size. In some applications, such tabs may be variably sized to allow greater flexibility in tuning.

As described above with respect to Figure 12, tiling in two dimensions can allow a large, high resolution display with less demand upon a scanner. Figure 38 shows one difficulty that may arise when four separate sources 3800, 3802, 3804, 3806 feed a common scanner 3808. As can be seen from the ray tracing for the lower left scanner 3800, the upper right source 3804 is positioned within an expected scanning field 3810 of the lower left source 3800. With no further adjustment, the upper right source 3804 would be expected to occlude a portion of the image from the lower left source 3800, producing an unilluminated region in the corresponding tile.

Figure 39 shows one approach in which the effects of overlapping of sources and beams can be reduced. In this embodiment, light arrives through separate fibers 3900, 3902, 3904, 3906 and is gathered and focused by respective GRIN lenses 3908, 3910, 3912, 3914 onto respective turning mirrors 3916, 3918, 3920, 3922. As is visible for two of the mirrors 3916, 3922 in Figure 40, the turning mirrors 3916, 3922 are very small mirrors that redirect light from their respective GRIN lenses 3908, 3914 toward a curved, partially reflective mirror 3924. The mirror 3924 returns the incident light toward a centrally positioned scanner 3926 that scans periodically, as described previously. The scanned light

passes through the partially transmissive mirror 3924 toward an image field 3928 where an image can be viewed.

As can be seen in Figure 40, the GRIN lenses 3908, 3914 gather diverging light from the respective fibers 3900, 3906 and reduce the beam width to substantially its minimum diameter at the respective turning mirror 3916, 3922. The beam 3930 then expands as it travels to the curved mirror 3924. The curved mirror 3924 converts the expanding beam 3930 into a substantially collimated or slightly converging beam 3932 having a diameter slightly smaller than the mirror width W of the scanner 3926.

It can be seen in Figure 40 that the turning mirrors 3916, 3918, 3920, 3922 will block light from other turning mirrors during a portion of their scans. However, because the turning mirrors block only small section of the beams and because the beams converge at the image field 3924, the effect will be a slight dimming of the corresponding pixel. Uncompensated, this might produce a slight variation from the desired pixel intensity. However, the programmable gate array 2506 described above with respect to Figure 29 can pre-weight the intensity to offset the dimming effects of the turning mirrors 3916, 3918, 3920, 3922.

To further improve efficiency the display of Figures 39 and 40 can also take advantage of properties of polarized light. In some applications, the fibers 3900, 3902, 3904, 3906 (or other light sources such as laser diodes) emit polarized light. A polarization dependent reflector 3934, such as 3M's Dual Brightness Enhancement Film coats the inner surface of the mirror and reflects the polarized incident beam 3930. As the reflected beam 3932 travels to the scanner 3926, the beam 3932 passes through a quarter wave plate that rotates the polarization by 45 degrees. The beam 3932 is then reflected by the scanner 3926 and passes through the quarter wave plate once again, so that the polarization rotates by a total of 90 degrees and is orthogonal to the original beam 3930. The orthogonally polarized beam passes efficiently through the polarization dependent reflector 3934 and travels to the image field 3928.

Figure 41 shows how the use of a tiling approach can reduce raster pinch without a correction scanner. In this embodiment, modulated light from an input fiber 4102 enters one or the other of a pair of transmission fibers 4104, 4106 as dictated by an optical switch 4108. Light exits the transmission fibers 4104, 4106 and strikes a common scanner 4110 that scans light from the first fiber 4104 onto a first region 4112 of an image field 4114 and scans light from the second fiber 4106 onto a second region 4116 of the image field 4114. The fibers 4104, 4106 are oriented so that the first and second regions 4112, 4116 overlap very slightly in an overlap area 4118.

During forward sweeps of the scanner 4110, an electronic controller 4120 activates the switch 4108 so that light passes through the second fiber 4106. The scanner 4110 thus redirects the light along a first scan line 4122 in the second region 4116. At the end of the forward sweep, the controller 4120 activates the switch 4108 so that light now passes through the first fiber 4104 and is scanned along a first scan line 4124 in the first region 4112. For each subsequent sweep of the scanner 4110, the controller 4120 activates the switch to produce sets of lines in each of the regions 4112, 4116. Because the vertical scan continues during the forward sweeps, the lines may be slightly tilted, as shown in Figure 41. While such tilt is typically not observable by a viewer, if desired, custom optics can produce a “counter”-tilt that offsets the scanning tilt. Alternatively, the image data may be predistorted by the programmable gate array 2506 described above with respect to Figure 29 to compensate.

This structure is not limited to two horizontal tiles or to a single light emitter. For example, as shown in Figure 42, light from two fibers can be switched into four fibers to produce a 2-by-2 tiled image.

In this approach, an input fiber 4200 is coupled to four fibers 4202, 4204, 4206, 4208 by a set of optical switches 4210, 4212, 4214, where each fiber feeds a scanning assembly 4216 from a respective angle. A switch controller 4220 activates the switches 4210, 4212, 4214 according to the direction of the sweep

and according to the tracked location of the user's gaze, as provided by a gaze tracker (not shown). The gaze tracker may be any known apparatus for determining gaze direction.

For example, when the user looks at the top half of the image, a first fiber 4206, aligned to produce an image in the upper left tile 4222 feeds the scanning assembly 4216 during the forward sweeps. A second fiber 4208, aligned to produce an upper right tile 4224 feeds the scanning assembly 4216 during reverse sweeps. When the user looks at the lower half of the image, a third fiber 4204, aligned to produce the lower left tile 4226, feeds scanning assembly 4216 during forward sweeps. A fourth fiber 4202, aligned to produce the lower right tile 4228, feeds the scanning assembly 4216 during reverse sweeps. While each of the fibers 4200, 4206, 4208, 4204 is represented as a single fiber, in some applications each fiber 4200, 4206, 4208, 4204 may actually include a plurality of fibers 4200, 4206, 4208, 4204. In such applications each fiber 4200, 4206, 4208, 4204 is fed by a plurality of input fibers 4200 and a corresponding plurality of switch sets. Such an embodiment advantageously allows a plurality of lines to be written simultaneously. Writing a plurality of lines simultaneously reduces the frequency of the horizontal scanner relative to the single line writing approaches described above, thereby reducing the difficulty of scanning. Also, providing light simultaneously from a plurality of light emitters reduces the amount of light energy required from each source for a given display brightness and reduces the modulation frequency of the beam. This reduces the performance requirements of the light sources, thereby decreasing the cost and complexity of the overall display.

While the embodiments of Figures 41 and 42 have been described herein using fibers and optical switches, in some applications, discrete light sources, such as laser diodes, LEDs, microlasers, or gas lasers may replace each fiber. In such applications, electrical switches (e.g., transistors) selectively control drive currents

to the respective sources or control external modulators aligned with the respective sources to control feeding of light during forward and reverse sweeps of the mirror.

Although the invention has been described herein by way of exemplary embodiments, variations in the structures and methods described herein may be made without departing from the spirit and scope of the invention. For example, the positioning of the various components may also be varied. In one example of repositioning, the correction scanners can be positioned in the optical path either before or after the other scanners. Also, an exit pupil expander may be added or omitted in many applications. In such embodiments, conventional eye tracking may be added to ease coupling of the scanned beam to the eye. Moreover, the scanning system can be used for projection displays, optical storage and a variety of other scanned light beam applications, in addition to scanned retinal displays. Further, a variety of other timing control mechanisms, such as programmable delays, may be used to compensate for the variable speed of the scanner in place of the approaches described with reference to Figures 24-31. Additionally, in some applications it may be desirable for ease of positioning or for other reasons to use a plurality of scanners, each of which may be fed by one or more beams. In such a structure, each scanner and its corresponding light sources produce respective sets of tiles. The overall image is then formed by combining the sets of tiles from each of the scanners, either by adjacent positioning or by overlapping. Although overlapping is generally preferred only where each scanner is used for a respective wavelength, in some applications overlapping may be used for interlacing or other approaches to image combination.

In another alternative approach to timing and distortion correction, the memory map may be undistorted and addressed at a constant rate. To compensate for nonlinearity of the scanner, the data for each location is derived from the retrieved image data and output at fixed increments. Referring to Figure 27, for example, data would be output at a time 1500, even though this time did not correspond directly to a pixel time. To compensate, the buffer 2508 is addressed

at the 10th and 11th locations for this line. Then, the output data is a weighted average of the data from the 10th and 11th locations. Thus, the buffer 2508 is clocked at a constant rate and pixels are output at a constant rate. Yet, by controlling the addressing circuitry carefully and performing a weighted averaging, the output data is sinusoidally corrected. Also, although the light emitters and light sources described herein utilize laser diodes or LEDs, with or without fibers, a variety of other light emitters such as microlasers, gas lasers, or other light emitting devices may be desirable in some applications. Moreover, although the exemplary scanning assemblies described herein utilize torsionally mounted mirrors, other scanning assembly structures, such as spinning polygons, comb drive mirrors, acousto-optic scanners, and other scanning structures may be within the scope of the invention. Also, while the beams are shown as converging upon a single scanner, in some applications it may be desirable to use separate scanners for each beam of light or to use a plurality of scanners that each reflect a plurality of beams. Accordingly, the invention is not limited except as by the appended claims.

CLAIMS

What is claimed is:

1. An apparatus for producing a scanned optical beam that scans through a substantially rectilinear pattern, comprising:

a first mirror mounted to scan periodically about a first axis at a first frequency, the first mirror being positioned to sweep the optical path about the first axis in a forward direction and a reverse direction;

a first light feed positioned in a first location and oriented to emit a first beam of light from a first location toward the first mirror, the first light feed being responsive to a first electrical signal to emit the first beam;

a second light feed positioned in a second location and oriented to emit a second beam of light from a second location toward the first mirror, the second light feed being responsive to a second electrical signal to emit the second beam; and

an electronic control circuit having a first output coupled to the first light feed and a second output coupled to the second light feed, the electronic control circuit being operative to provide the first electrical signal when the mirror sweeps in the forward direction and operative to provide the second electrical signal when the mirror sweeps in the second direction.

2. The apparatus of claim 1 further comprising:

a position detector coupled to the electronic control circuit and responsive to movement of the mirror to produce a sense signal indicative of the whether the mirror is sweeping in the forward or reverse direction, wherein the electronic control circuit is responsive to the sense signal to provide the first electrical signal during forward sweeps and the second electrical signal during reverse sweeps.

3. The apparatus of claim 1 wherein the first feed is positioned and oriented such that the first beam of light scans over a first angular range and wherein the second feed is positioned and oriented such that the second beam of light scans over a second angular range that is substantially nonoverlapping with respect to the first angular range.
4. The apparatus of claim 1 further comprising a light emitter and an optical switch, the optical switch including a light input coupled to the light emitter, a first output, a second output, and an electrical input, wherein the optical switch is responsive to the first electrical signal to direct light from the optical input to the first output and is responsive to the second electrical signal to direct light from the optical input to the second output.
5. The apparatus of claim 1 further wherein the first light feed includes a first light emitter and the second light feed includes a second light emitter different from the first light emitter.
6. An apparatus for scanning light energy from or toward a target area, comprising:
 - a scanning mirror configured to scan continuously from a first angular extreme to a second angular extreme;
 - a first optical emitter or detector aligned to the scanning mirror and positioned to image or illuminate a first region of the target area when the scanning mirror is at the first angular extreme and to image or illuminate a second region of the target area different from the first region when the scanning mirror is at the second angular extreme; and
 - a second optical emitter or detector aligned to the scanning mirror and positioned to image or illuminate the second region of the target area when the scanning mirror is at the first angular extreme and to image or illuminate a third

region of the target area different from the first and second regions when the scanning mirror is at the second angular extreme.

7. The apparatus of claim 6 further comprising:

a second mirror positioned both in a first optical path between the first optical emitter or detector and the second region and in a second optical path between the second optical emitter or detector and the second region, the second mirror being mounted to pivot about an axis orthogonal to a pivot axis of the scanning mirror.

8. The apparatus of claim 6 wherein the scanning mirror is mounted to pivot along a sweep direction orthogonal to the first and second angular extremes, the scanning mirror being simultaneously movable along the sweep direction and between the angular extremes.

9. The apparatus of claim 6 wherein the scanning mirror is pivotable along two axes, further including a driving source coupled to the scanning mirror and operative to pivot the scanning mirror through a scan path that defines a substantially raster pattern of imaging or illuminating of the first detector or emitter.

10. A scanning display responsive to an image signal having signal portions representing lines of a display, comprising:

a first light source responsive to a first signal to emit light along a first optical path;

a second light source responsive to a second signal to emit light along a second optical path;

a scanning assembly positioned to receive light from the first and second light sources and to redirect the receive light from the first light source along a first scan path toward a first image region and to redirect the received light from the second light source along a second scan path toward a second image region; and

an electronic controller having an input port for receiving the image signal, the electronic controller being operative to divide each signal portion into parts, each part representing a segment of the respective line and to produce the first signal in response to a first of the segments and to produce the second signal in response to a second of the segments.

11. The display of claim 10 wherein the scanner and light sources are positioned such that the first and second regions are substantially non-overlapping.

12. The display of claim 10 wherein each of the first and second light sources includes a plurality of light emitting devices, each light emitting device having a respective wavelength range.

13. The display of claim 12 wherein the wavelength range of each light emitting device in each plurality of light emitting devices is different from the wavelength range of the other light emitting devices in that plurality of light emitting devices.

14. The display of claim 10 wherein the first and second light sources share a common light emitting device.

15. The display of claim 14 further including an electronically controlled light guide having a first path extending between the common light emitting device and first light source and a second path extending between the common light emitting

device and second light source, the electronically controlled light guide being selectively switchable between the first and second paths.

16. A method of scanning a substantially raster pattern in a system having at least one resonant scanner having a forward scan direction and a reverse scan direction, comprising the steps of:

providing light to the resonant scanner from a first optical source when the resonant scanner is scanning in the forward scan direction; and

providing light to the resonant scanner from a second optical source different from the first optical source when the resonant scanner is scanning in the reverse scan direction.

17. The method of claim 16 further comprising the steps of:

directing light from the resonant scanner to a first viewing region when the resonant scanner is scanning in the forward scan direction; and

directing light from the resonant scanner to a second viewing region when the resonant scanner is scanning in the reverse scan direction.

18. The method of claim 17 wherein the first and second viewing regions are substantially nonoverlapping.

19. The method of claim 18 wherein the first and second viewing regions are immediately adjacent.

20. The method of claim 15 wherein the resonant scanner includes a scanning mirror that scans through a periodic pattern and wherein the step of providing light to the resonant scanner from a first optical source when the resonant scanner is scanning in the forward scan direction includes directing light from a first location to the scanning mirror along a first optical path and wherein the step of directing

light from the resonant scanner to a second viewing region when the resonant scanner is scanning in the reverse scan direction includes directing light from a second location to the scanning mirror along a second optical path that is not parallel to the first optical path.

21. The method of claim 15 further including:

modulating light from the first optical source according to a first portion of a desired image when the resonant scanner is scanning in the forward scan direction; and

modulating light from the second optical source according to a second portion of the desired image different from the first portion when the resonant scanner is scanning in the reverse scan direction.

22. The method of claim 21 wherein the first and second portions are substantially contiguous, adjacent portions of the desired image.

23. The method of claim 22 wherein the first and second portions are substantially nonoverlapping.

24. A method of scanning light through a selected target area, comprising the steps of:

scanning with a scanning assembly a first optical path through a first substantially raster pattern, the first substantially raster pattern including both forward and reverse sweeps;

while scanning the first optical path through the first substantially raster pattern, scanning with the scanning assembly a second optical path through a second substantially raster pattern, the second substantially raster pattern including both forward and reverse sweeps;

blocking the first optical path during reverse sweeps;

transmitting light along the first optical path during forward sweeps;
blocking the second optical path during forward sweeps; and
transmitting light along the second optical path during reverse sweeps.

25. The method of claim 25 further including:

modulating the light according to first portions of respective image lines
during the forward sweeps; and

modulating the light according to second portions of respective image lines
during the reverse sweeps, wherein the first and second portions form the
respective image lines.

26. The method of claim 25 wherein the scanning assembly includes a resonant
scanning mirror further including:

defining the first optical path by aligning a first light emitter to the scanning
mirror in a first orientation; and

defining the second optical path by aligning a second light emitter different
from the first light emitter to the scanning mirror in a second orientation.

SCANNED DISPLAY WITH SWITCHED FEEDS AND DISTORTION CORRECTION

ABSTRACT OF THE INVENTION

A display apparatus includes a scanning assembly that scans about two or more axes, typically in a raster pattern. A plurality of light sources emit light from spaced apart locations toward the scanning assembly such that the scanning assembly simultaneously scans more than one of the beams. The light sources are positioned such that their beams each illuminate a discrete region of the image field that is substantially non-overlapping with respect to the other discrete regions. Each line of the image is formed from a set of segments where two or more of the segments define a line of an image. Because the lines are made from discrete segments, the problem of raster pinch is reduced. Where a single sweep of the scanning assembly scans a plurality of segments simultaneously, the achievable resolution of the display for a given scan angle and mirror size is increased relative to a mirror sweeping a single beam. In alternative embodiments, the scanning approach is used for imaging. Also, segments of different wavelengths can be overlapped to produce a color display.

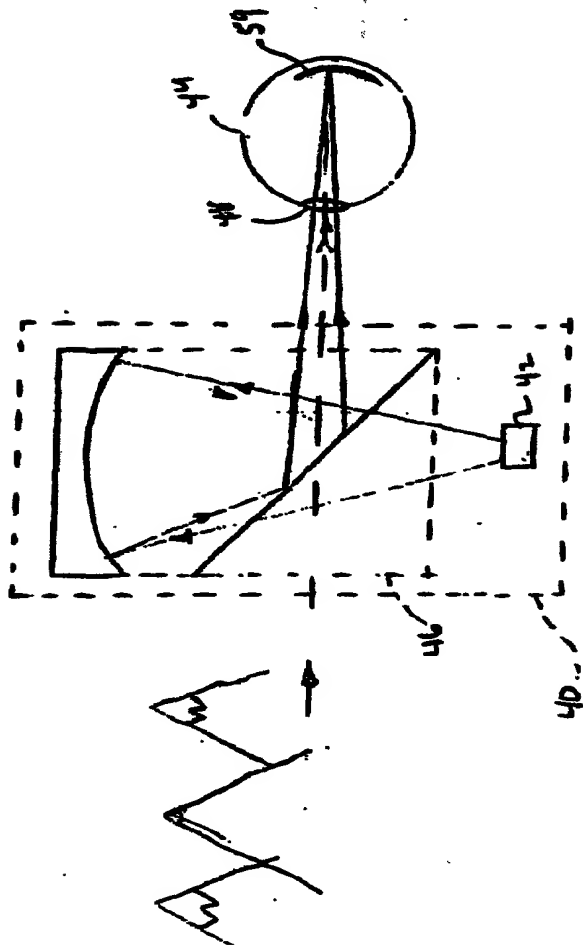


FIG 1

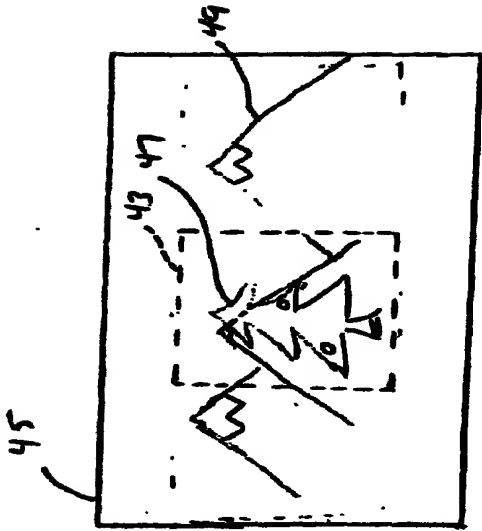


FIG 2A


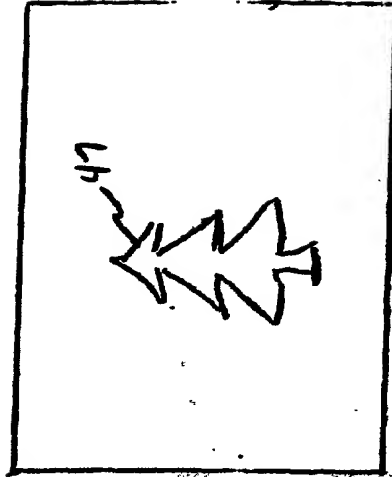


FIG 2B

092696 080559
655020 9495360

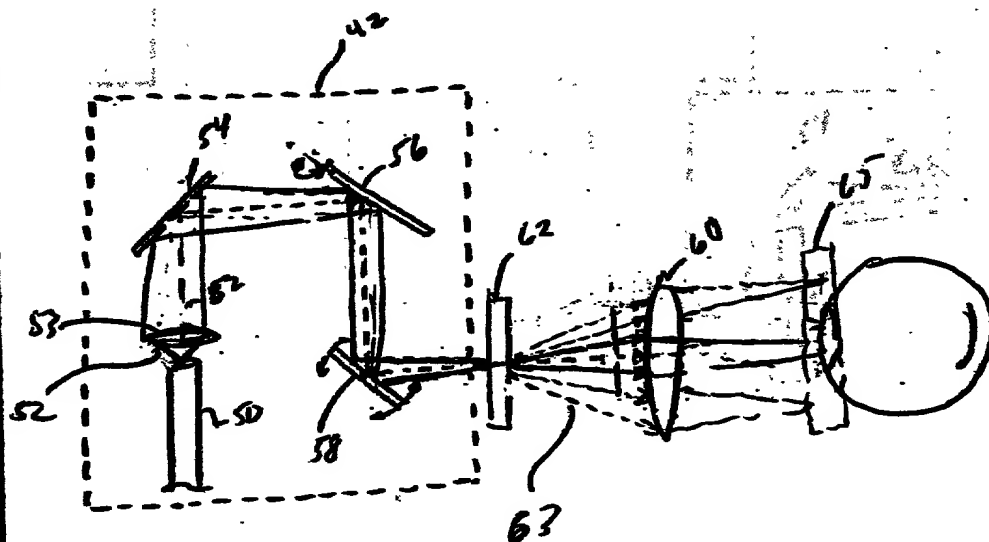

655000 94769250

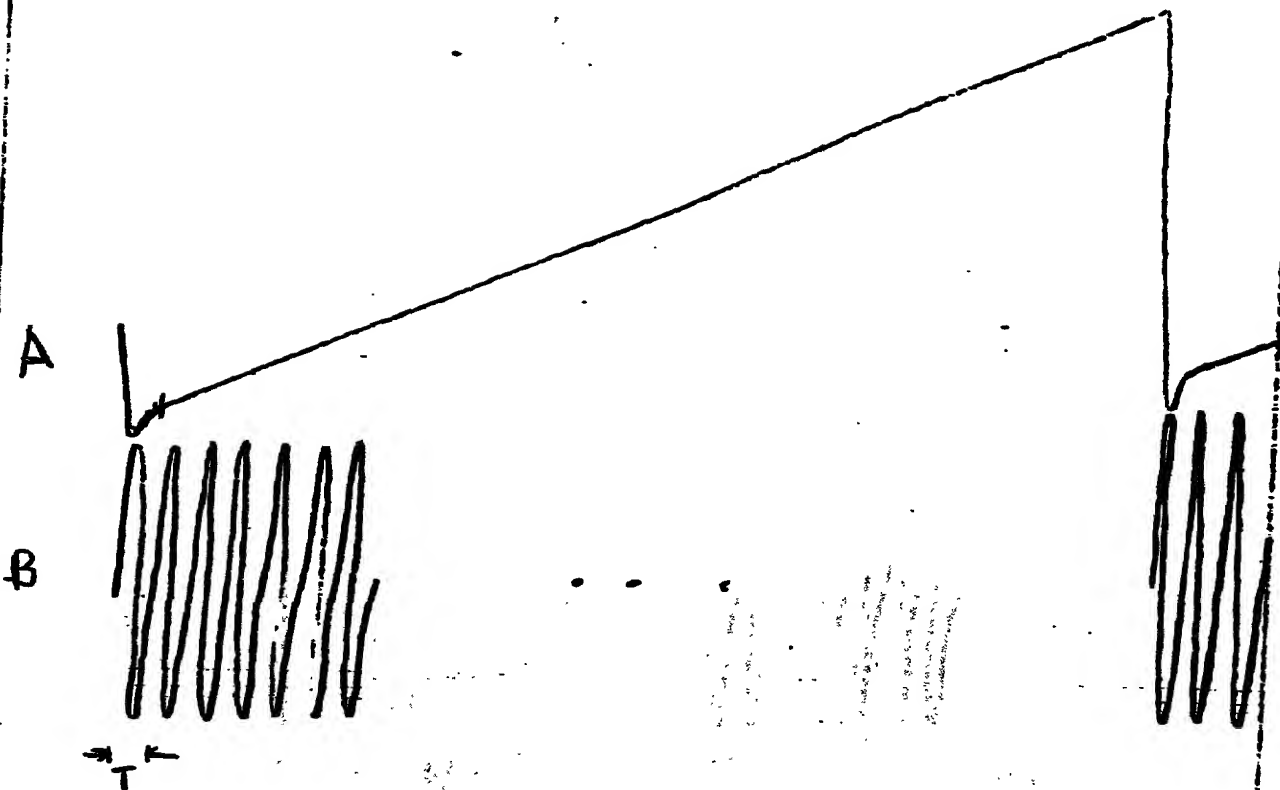


Fig. 4.

665020 2269560

69? 10624

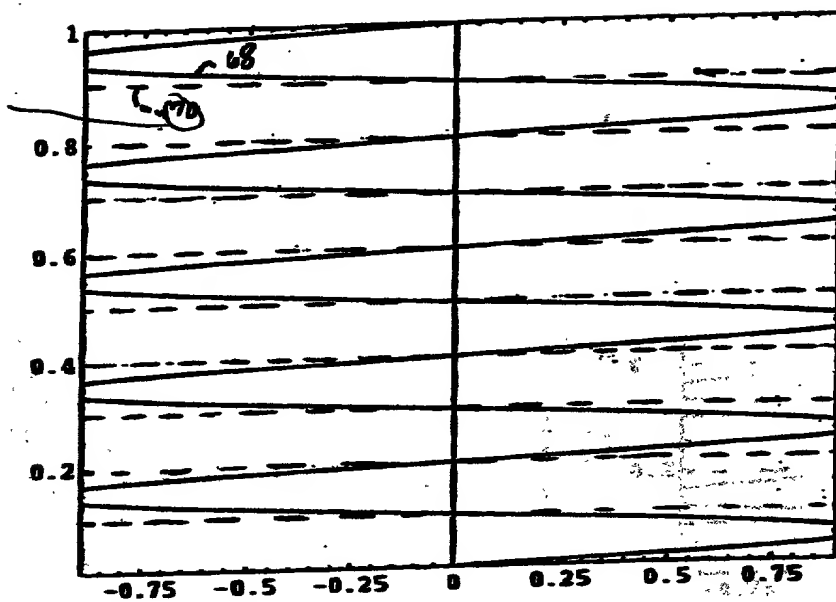


FIG 5

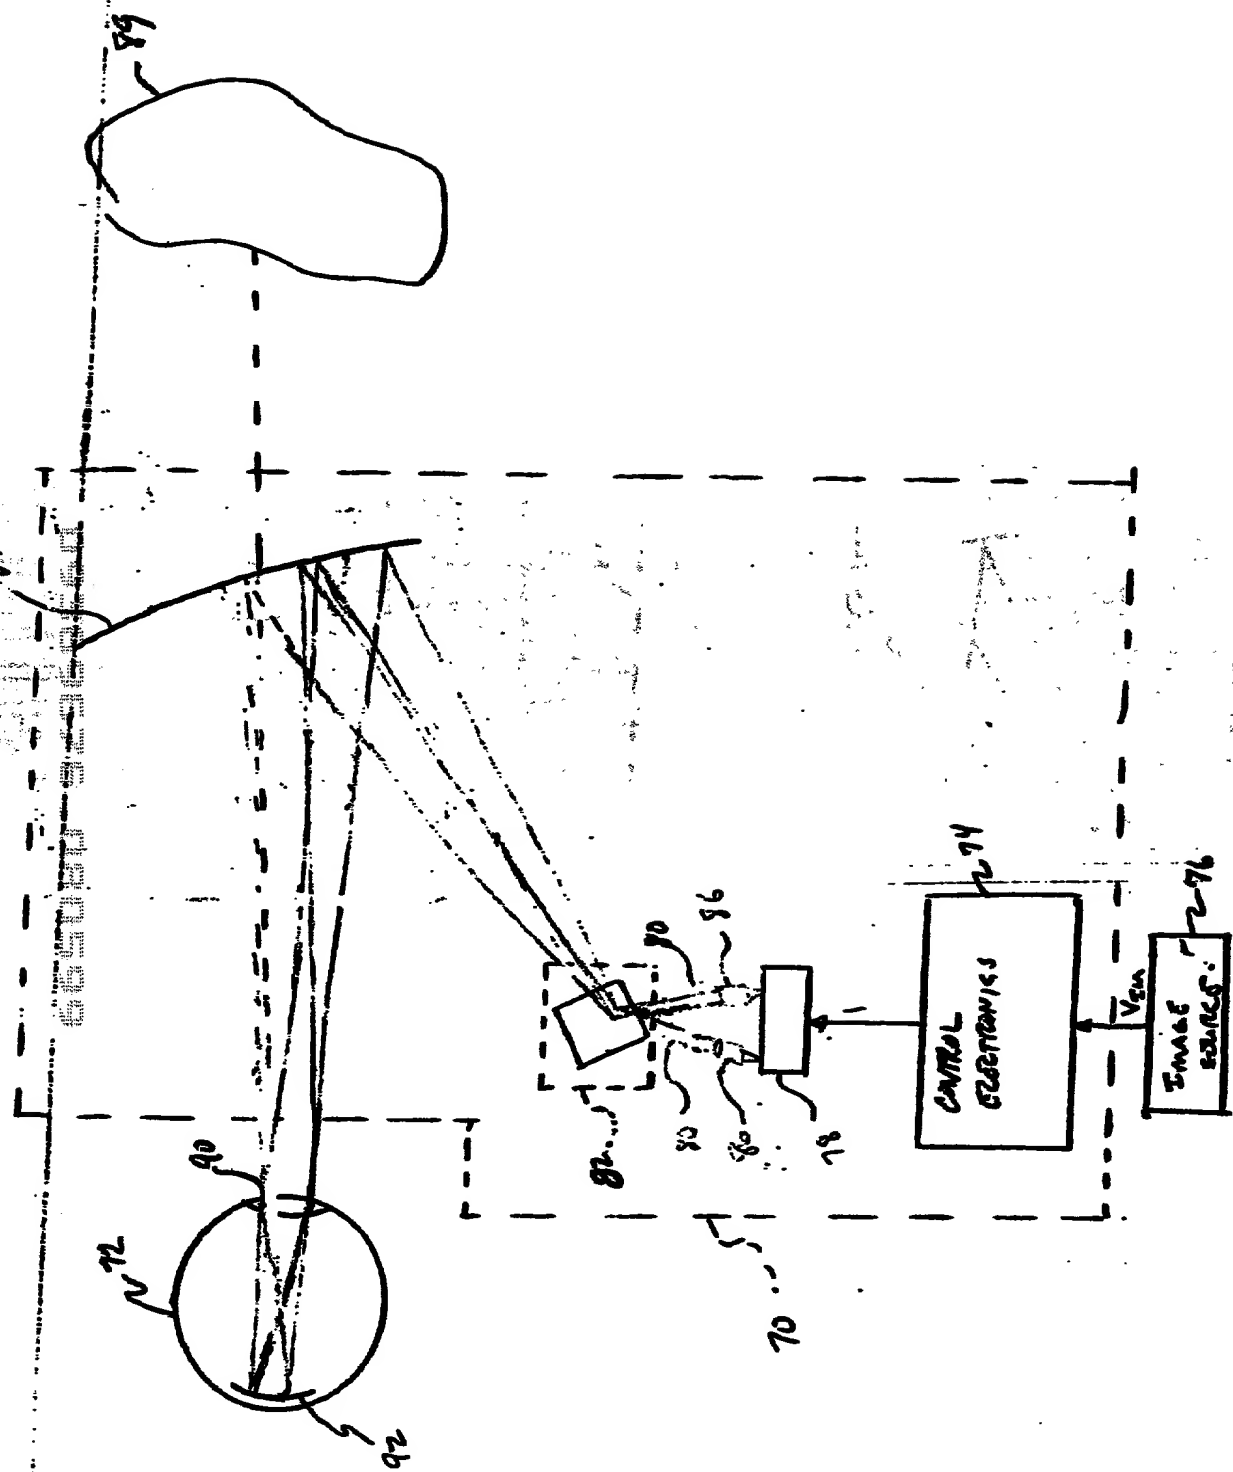


FIG 6


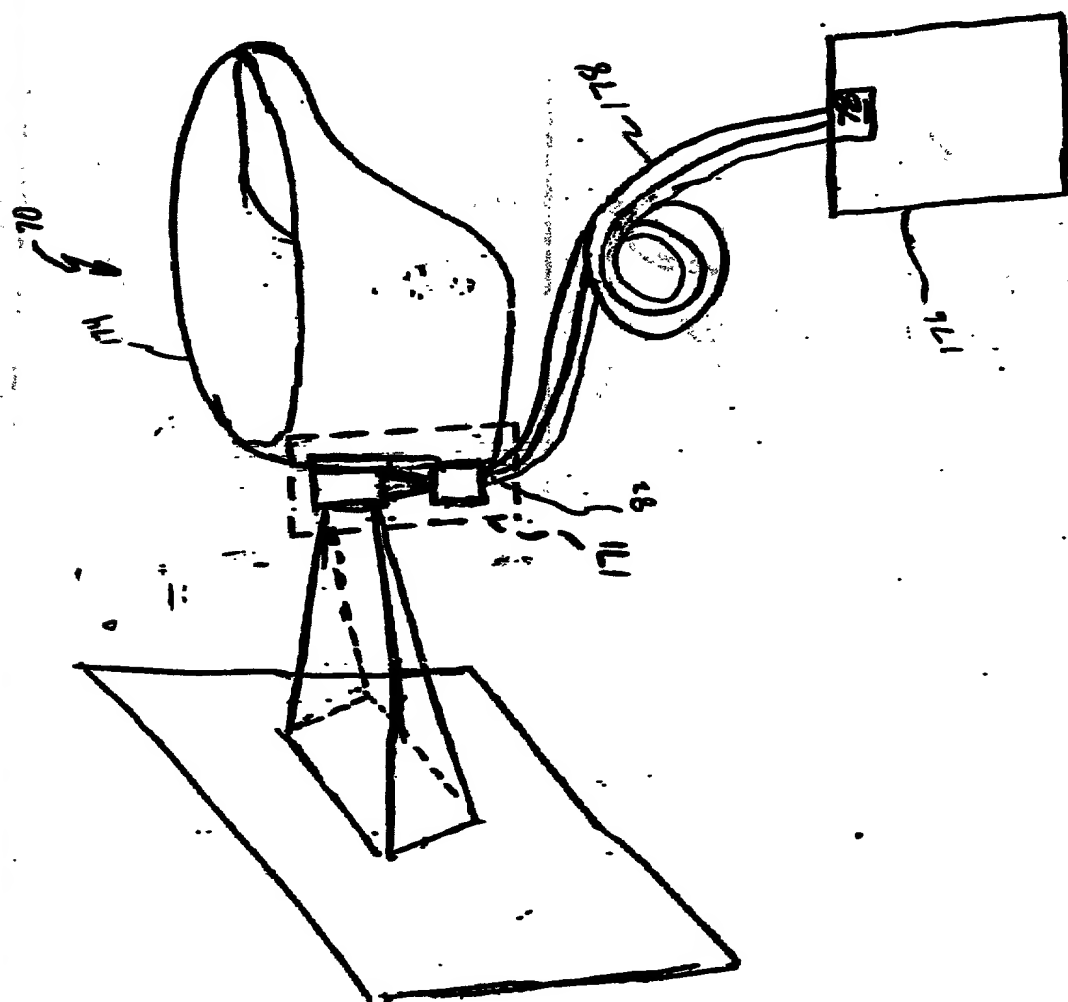


FIG. 7

665000 9255950

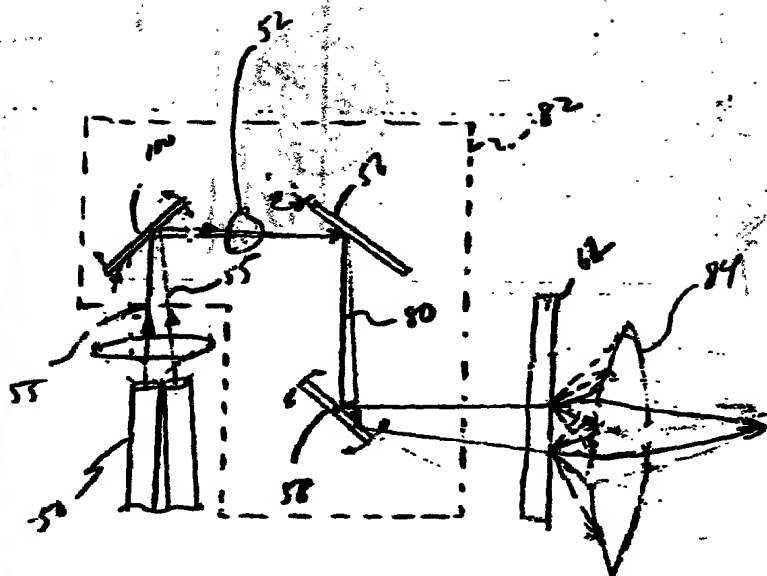

665020-9/9692610

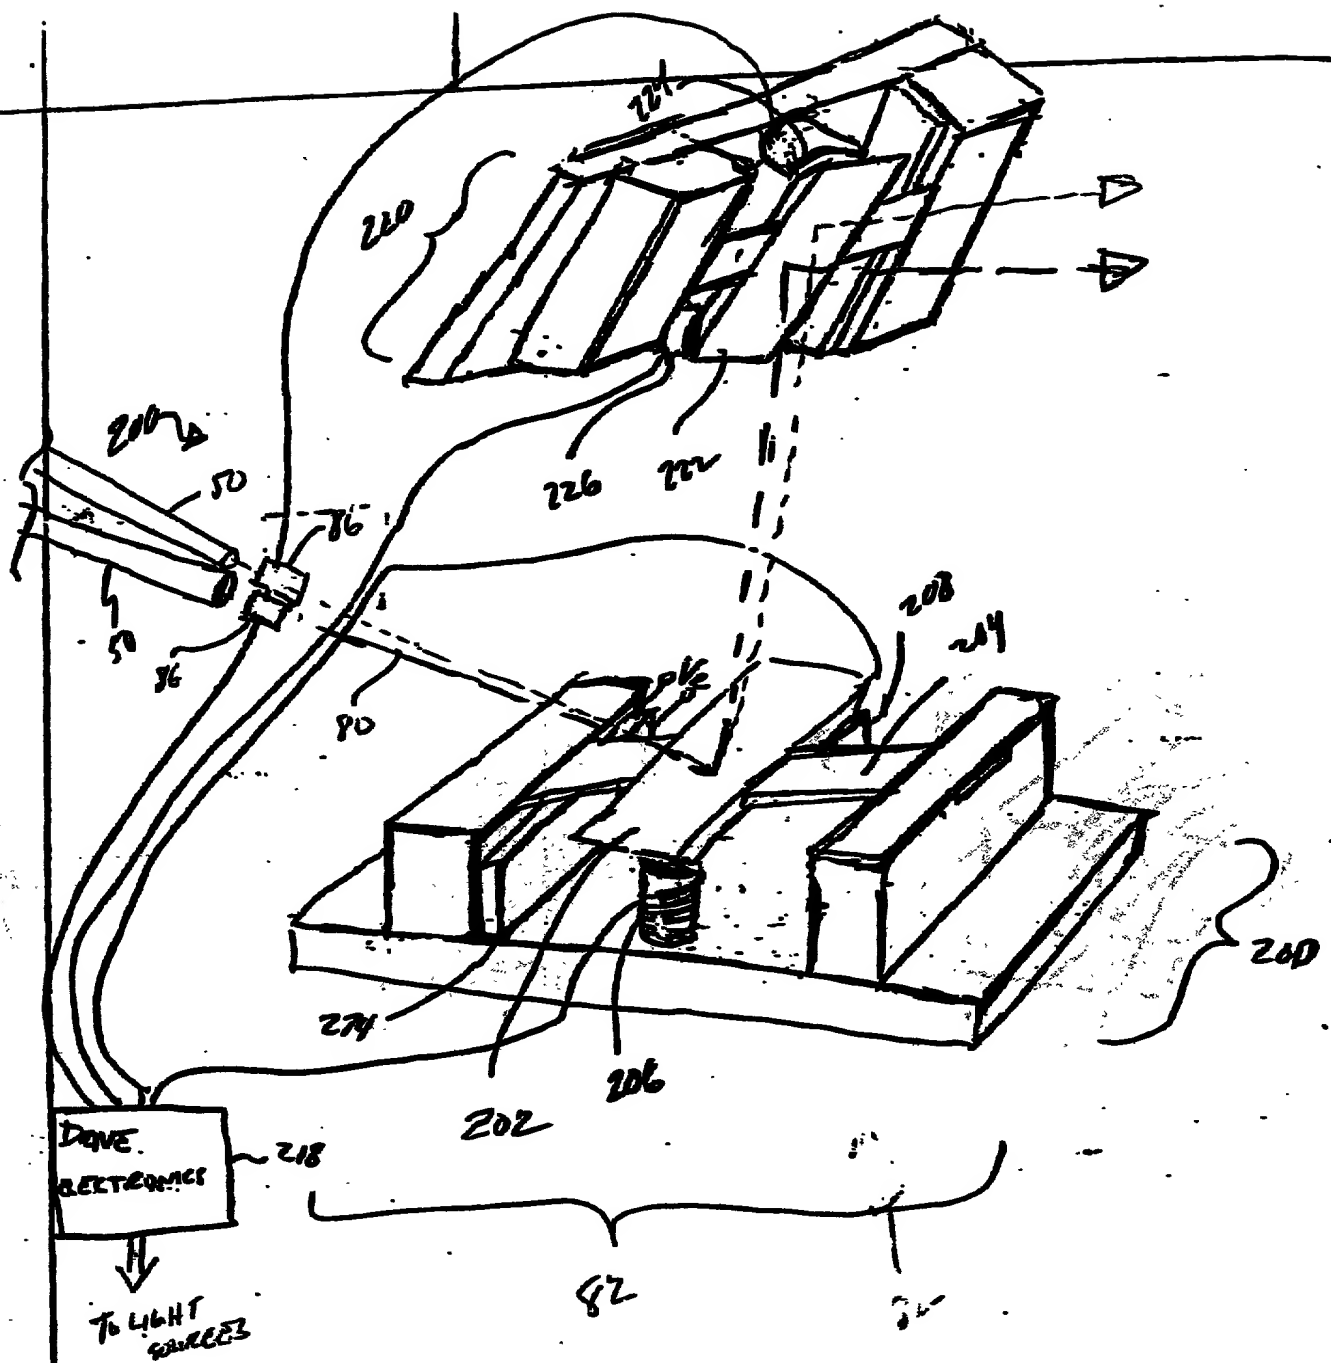


FIG 9

FIG 10

09369676-000000


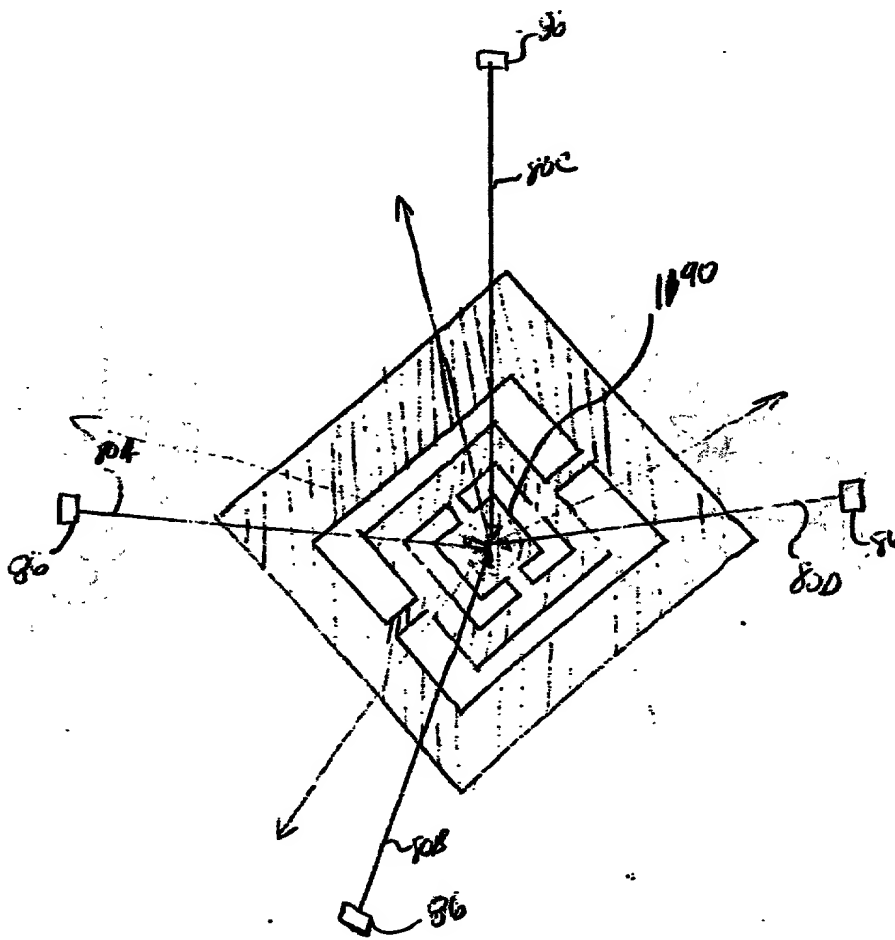


FIG. 11

1871
 1872
 1873
 1874
 1875
 1876
 1877
 1878
 1879
 1880
 1881
 1882
 1883
 1884
 1885
 1886
 1887
 1888
 1889
 1890
 1891
 1892
 1893
 1894
 1895
 1896
 1897
 1898
 1899
 1900
 1901
 1902
 1903
 1904
 1905
 1906
 1907
 1908
 1909
 1910
 1911
 1912
 1913
 1914
 1915
 1916
 1917
 1918
 1919
 1920
 1921
 1922
 1923
 1924
 1925
 1926
 1927
 1928
 1929
 1930
 1931
 1932
 1933
 1934
 1935
 1936
 1937
 1938
 1939
 1940
 1941
 1942
 1943
 1944
 1945
 1946
 1947
 1948
 1949
 1950
 1951
 1952
 1953
 1954
 1955
 1956
 1957
 1958
 1959
 1960
 1961
 1962
 1963
 1964
 1965
 1966
 1967
 1968
 1969
 1970
 1971
 1972
 1973
 1974
 1975
 1976
 1977
 1978
 1979
 1980
 1981
 1982
 1983
 1984
 1985
 1986
 1987
 1988
 1989
 1990
 1991
 1992
 1993
 1994
 1995
 1996
 1997
 1998
 1999
 2000
 2001
 2002
 2003
 2004
 2005
 2006
 2007
 2008
 2009
 2010
 2011
 2012
 2013
 2014
 2015
 2016
 2017
 2018
 2019
 2020
 2021
 2022
 2023
 2024
 2025
 2026
 2027
 2028
 2029
 2030
 2031
 2032
 2033
 2034
 2035
 2036
 2037
 2038
 2039
 2040
 2041
 2042
 2043
 2044
 2045
 2046
 2047
 2048
 2049
 2050
 2051
 2052
 2053
 2054
 2055
 2056
 2057
 2058
 2059
 2060
 2061
 2062
 2063
 2064
 2065
 2066
 2067
 2068
 2069
 2070
 2071
 2072
 2073
 2074
 2075
 2076
 2077
 2078
 2079
 2080
 2081
 2082
 2083
 2084
 2085
 2086
 2087
 2088
 2089
 2090
 2091
 2092
 2093
 2094
 2095
 2096
 2097
 2098
 2099
 2100
 2101
 2102
 2103
 2104
 2105
 2106
 2107
 2108
 2109
 2110
 2111
 2112
 2113
 2114
 2115
 2116
 2117
 2118
 2119
 2120
 2121
 2122
 2123
 2124
 2125
 2126
 2127
 2128
 2129
 2130
 2131
 2132
 2133
 2134
 2135
 2136
 2137
 2138
 2139
 2140
 2141
 2142
 2143
 2144
 2145
 2146
 2147
 2148
 2149
 2150
 2151
 2152
 2153
 2154
 2155
 2156
 2157
 2158
 2159
 2160
 2161
 2162
 2163
 2164
 2165
 2166
 2167
 2168
 2169
 2170
 2171
 2172
 2173
 2174
 2175
 2176
 2177
 2178
 2179
 2180
 2181
 2182
 2183
 2184
 2185
 2186
 2187
 2188
 2189
 2190
 2191
 2192
 2193
 2194
 2195
 2196
 2197
 2198
 2199
 2200
 2201
 2202
 2203
 2204
 2205
 2206
 2207
 2208
 2209
 2210
 2211
 2212
 2213
 2214
 2215
 2216
 2217
 2218
 2219
 2220
 2221
 2222
 2223
 2224
 2225
 2226
 2227
 2228
 2229
 2230
 2231
 2232
 2233
 2234
 2235
 2236
 2237
 2238
 2239
 2240
 2241
 2242
 2243
 2244
 2245
 2246
 2247
 2248
 2249
 2250
 2251
 2252
 2253
 2254
 2255
 2256
 2257
 2258
 2259
 2260
 2261
 2262
 2263
 2264
 2265
 2266
 2267
 2268
 2269
 2270
 2271
 2272
 2273
 2274
 2275
 2276
 2277
 2278
 2279
 2280
 2281
 2282
 2283
 2284
 2285
 2286
 2287
 2288
 2289
 2290
 2291
 2292
 2293
 2294
 2295
 2296
 2297
 2298
 2299
 2300
 2301
 2302
 2303
 2304
 2305
 2306
 2307
 2308
 2309
 2310
 2311
 2312
 2313
 2314
 2315
 2316
 2317
 2318
 2319
 2320
 2321
 2322
 2323
 2324
 2325

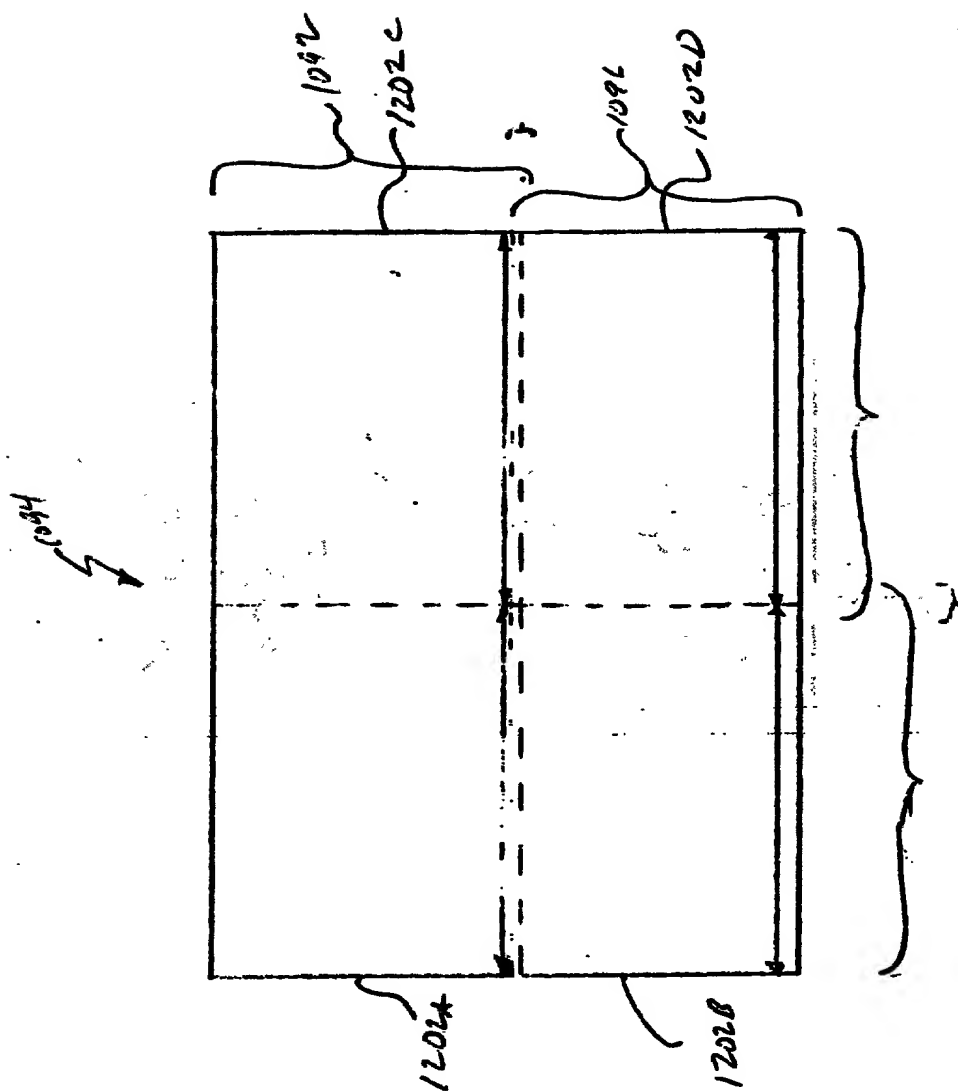

F16.72


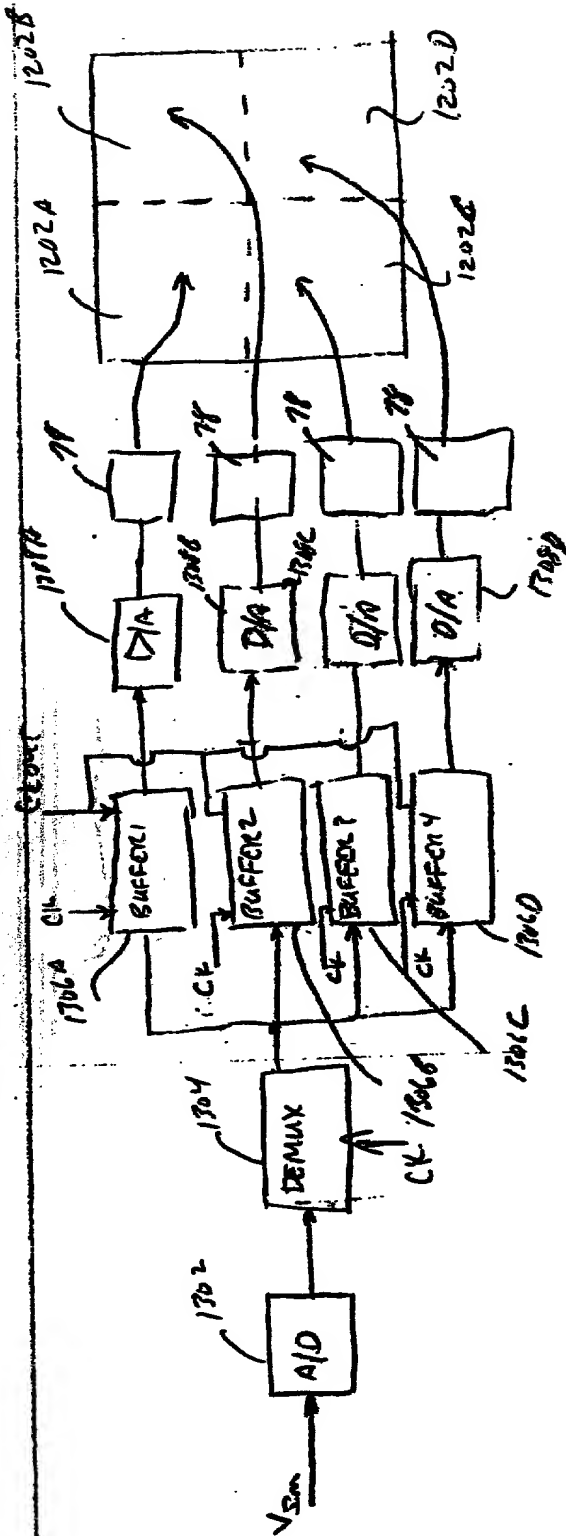



FIG 13

09365676.0802599

Fig. 14

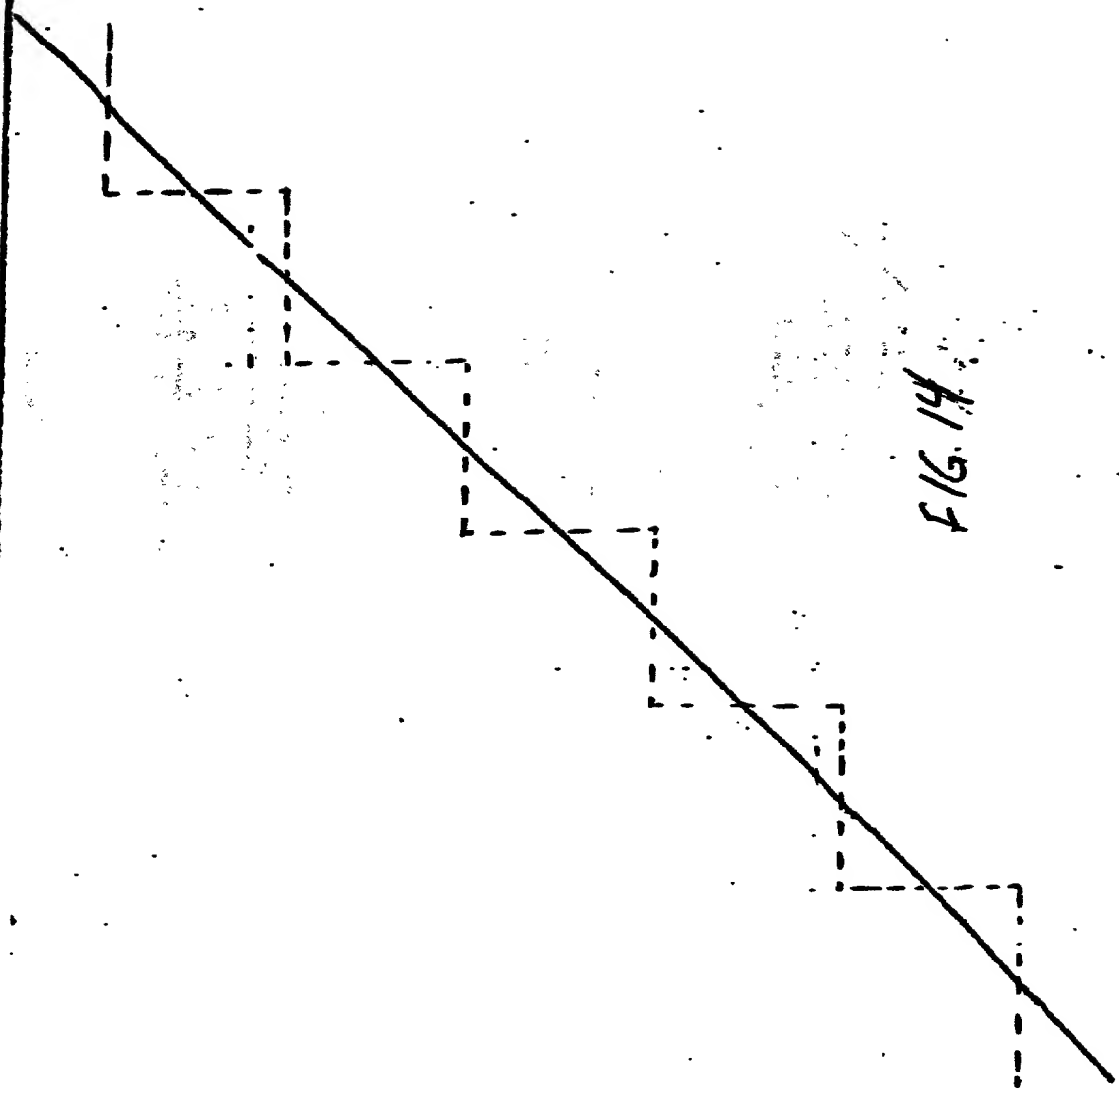

1871 1872 1873 1874 1875 1876 1877 1878 1879 1880 1881 1882 1883 1884 1885 1886 1887 1888 1889 1890 1891 1892 1893 1894 1895 1896 1897 1898 1899 1900 1901 1902 1903 1904 1905 1906 1907 1908 1909 1910 1911 1912 1913 1914 1915 1916 1917 1918 1919 1920 1921 1922 1923 1924 1925 1926 1927 1928 1929 1930 1931 1932 1933 1934 1935 1936 1937 1938 1939 1940 1941 1942 1943 1944 1945 1946 1947 1948 1949 1950 1951 1952 1953 1954 1955 1956 1957 1958 1959 1960 1961 1962 1963 1964 1965 1966 1967 1968 1969 1970 1971 1972 1973 1974 1975 1976 1977 1978 1979 1980 1981 1982 1983 1984 1985 1986 1987 1988 1989 1990 1991 1992 1993 1994 1995 1996 1997 1998 1999 2000 2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030 2031 2032 2033 2034 2035 2036 2037 2038 2039 2040 2041 2042 2043 2044 2045 2046 2047 2048 2049 2050 2051 2052 2053 2054 2055 2056 2057 2058 2059 2060 2061 2062 2063 2064 2065 2066 2067 2068 2069 2070 2071 2072 2073 2074 2075 2076 2077 2078 2079 2080 2081 2082 2083 2084 2085 2086 2087 2088 2089 2090 2091 2092 2093 2094 2095 2096 2097 2098 2099 2100 2101 2102 2103 2104 2105 2106 2107 2108 2109 2110 2111 2112 2113 2114 2115 2116 2117 2118 2119 2120 2121 2122 2123 2124 2125 2126 2127 2128 2129 2130 2131 2132 2133 2134 2135 2136 2137 2138 2139 2140 2141 2142 2143 2144 2145 2146 2147 2148 2149 2150 2151 2152 2153 2154 2155 2156 2157 2158 2159 2160 2161 2162 2163 2164 2165 2166 2167 2168 2169 2170 2171 2172 2173 2174 2175 2176 2177 2178 2179 2180 2181 2182 2183 2184 2185 2186 2187 2188 2189 2190 2191 2192 2193 2194 2195 2196 2197 2198 2199 2200 2201 2202 2203 2204 2205 2206 2207 2208 2209 2210 2211 2212 2213 2214 2215 2216 2217 2218 2219 2220 2221 2222 2223 2224 2225 2226 2227 2228 2229 2230 2231 2232 2233 2234 2235 2236 2237 2238 2239 2240 2241 2242 2243 2244 2245 2246 2247 2248 2249 2250 2251 2252 2253 2254 2255 2256 2257 2258 2259 2260 2261 2262 2263 2264 2265 2266 2267 2268 2269 2270 2271 2272 2273 2274 2275 2276 2277 2278 2279 2280 2281 2282 2283 2284 2285 2286 2287 2288 2289 2290 2291 2292 2293 2294 2295 2296 2297 2298 2299 2300 2301 2302 2303 2304 2305 2306 2307 2308 2309 2310 2311 2312 2313 2314 2315 2316 2317 2318 2319 2320 2321 2322 2323 2324 2325 2326 2327 2328 2329 2330 2331 2332 2333 2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2346 2347 2348 2349 2350 2351 2352 2353 2354 2355 2356 2357 2358 2359 2360 2361 2362 2363 2364 2365 2366 2367 2368 2369 2370 2371 2372 2373 2374 2375 2376 2377 2378 2379 2380 2381 2382 2383 2384 2385 2386 2387 2388 2389 2390 2391 2392 2393 2394 2395 2396 2397 2398 2399 2400 2401 2402 2403 2404 2405 2406 2407 2408 2409 2410 2411 2412 2413 2414 2415 2416 2417 2418 2419 2420 2421 2422 2423 2424 2425 2426 2427 2428 2429 2430 2431 2432 2433 2434 2435 2436 2437 2438 2439 2440 2441 2442 2443 2444 2445 2446 2447 2448 2449 2450 2451 2452 2453 2454 2455 2456 2457 2458 2459 2460 2461 2462 2463 2464 2465 2466 2467 2468 2469 2470 2471 2472 2473 2474 2475 2476 2477 2478 2479 2480 2481 2482 2483 2484 2485 2486 2487 2488 2489 2490 2491 2492 2493 2494 2495 2496 2497 2498 2499 2500 2501 2502 2503 2504 2505 2506 2507 2508 2509 2510 2511 2512 2513 2514 2515 2516 2517 2518 2519 2520 2521 2522 2523 2524 2525 2526 2527 2528 2529 2530 2531 2532 2533 2534 2535 2536 2537 2538 2539 2540 2541 2542 2543 2544 2545 2546 2547 2548 2549 2550 2551 2552 2553 2554 2555 2556 2557 2558 2559 2560 2561 2562 2563 2564 2565 2566 2567 2568 2569 2570 2571 2572 2573 2574 2575 2576 2577 2578 2579 2580 2581 2582 2583 2584 2585 2586 2587 2588 2589 2590 2591 2592 2593 2594 2595 2596 2597 2598 2599 2600 2601 2602 2603 2604 2605 2606 2607 2608 2609 2610 2611 2612 2613 2614 2615 2616 2617 2618 2619 2620 2621 2622 2623 2624 2625 2626 2627 2628 2629 2630 2631 2632 2633 2634 2635 2636 2637 2638 2639 2640 2641 2642 2643 2644 2645 2646 2647 2648 2649 2650 2651 2652 2653 2654 2655 2656 2657 2658 2659 2660 2661 2662 2663 2664 2665 2666 2667 2668 2669 2670 2671 2672 2673 2674 2675 2676 2677 2678 2679 2680 2681 2682 2683 2684 2685 2686 2687 2688 2

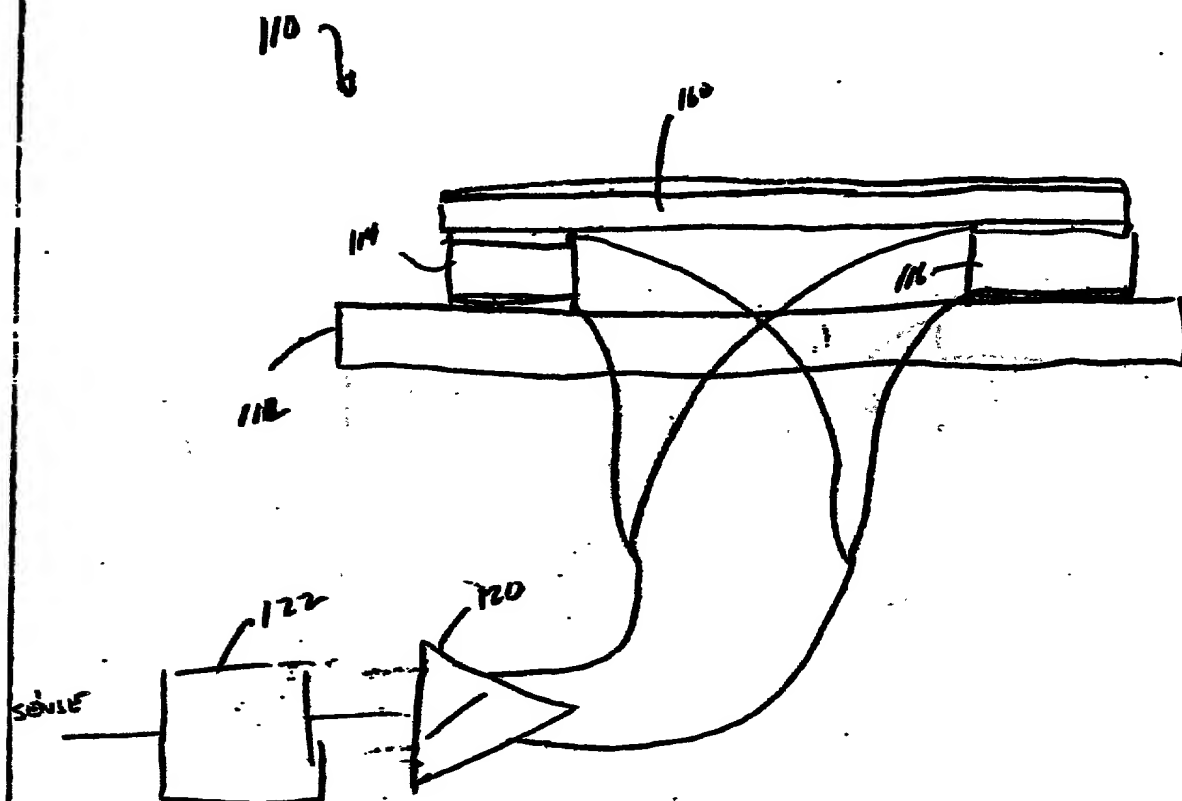

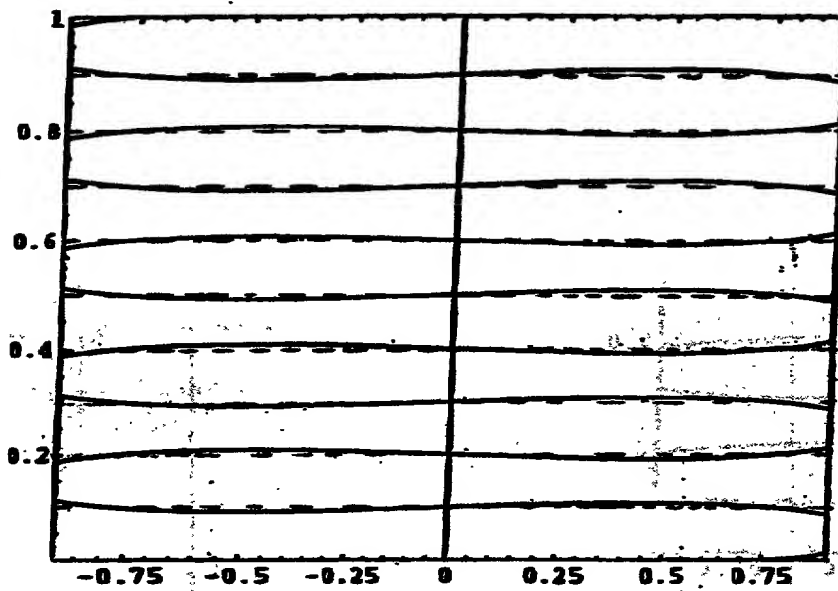


FIG 18

003632.000000

66330-2259200

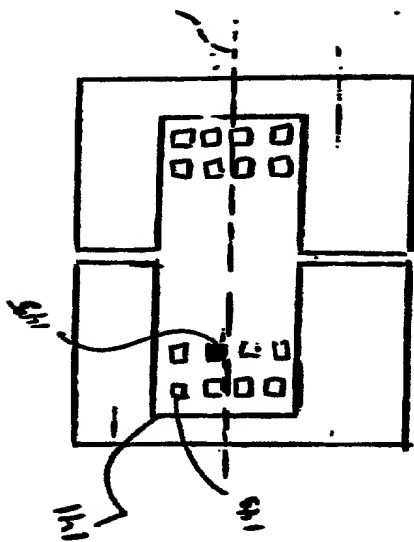


FIG 19

147



FIG 20



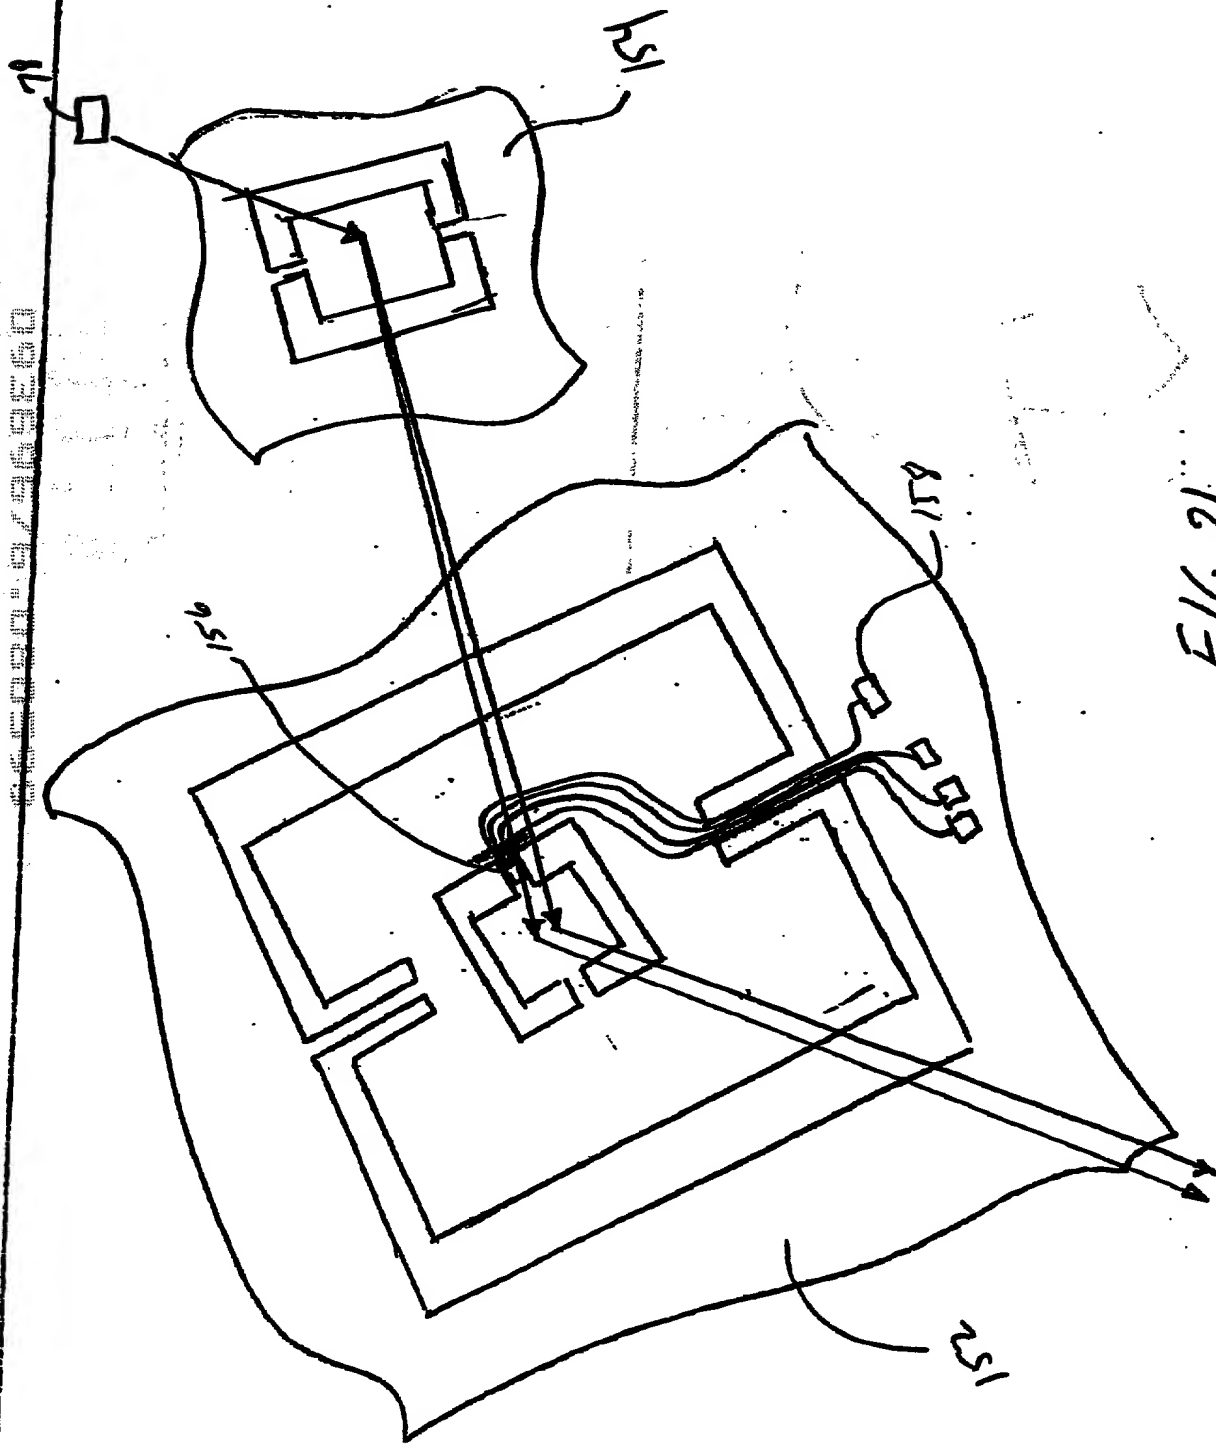


FIG. 21


665080-929960

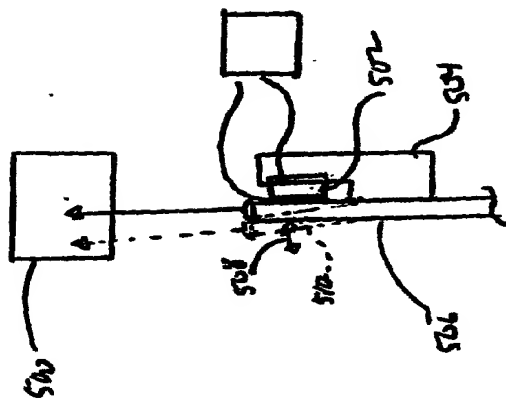

F/G, 22

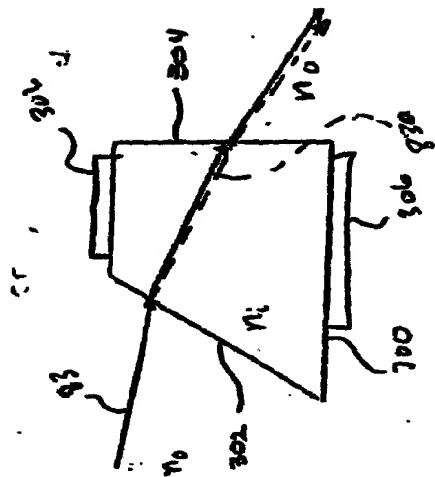

F/623



F/G 23

033500 030500 030500



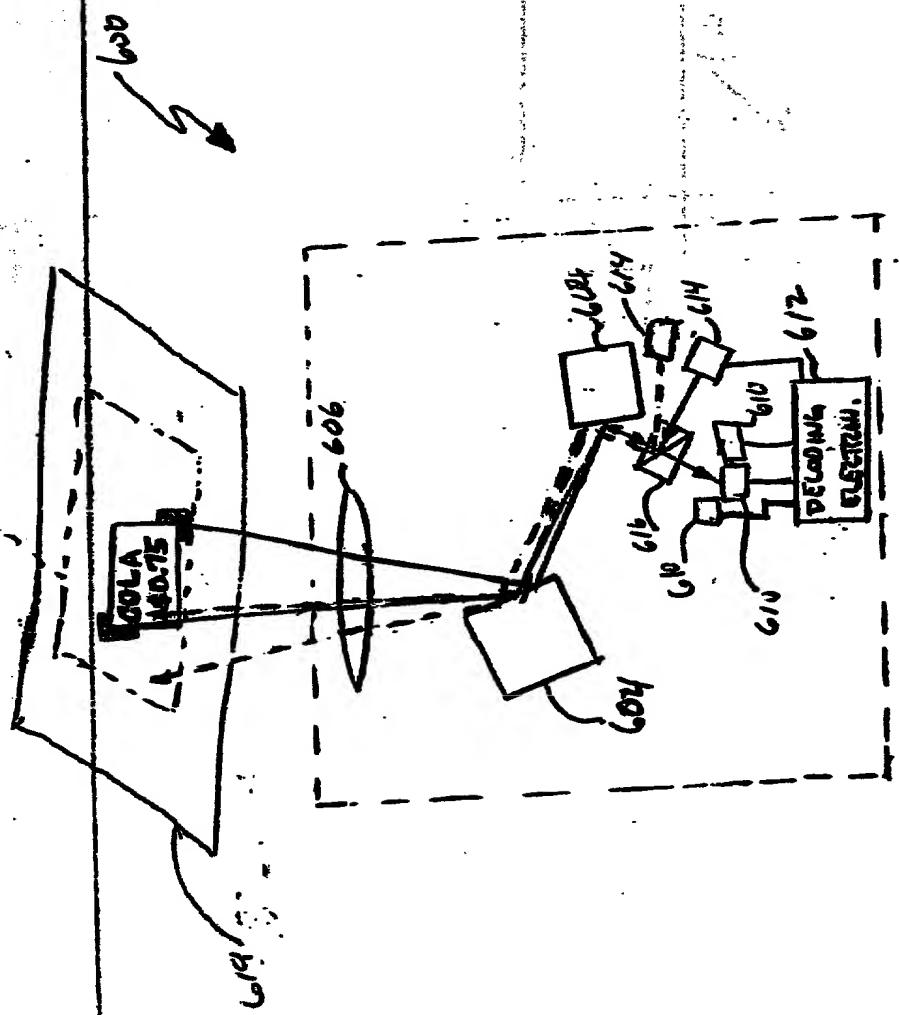


FIG 25


003506Z 080900

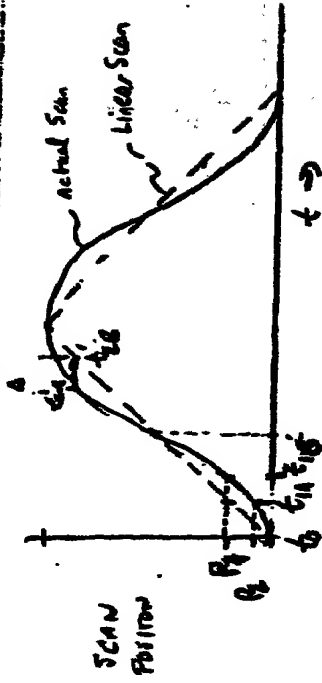

F1626

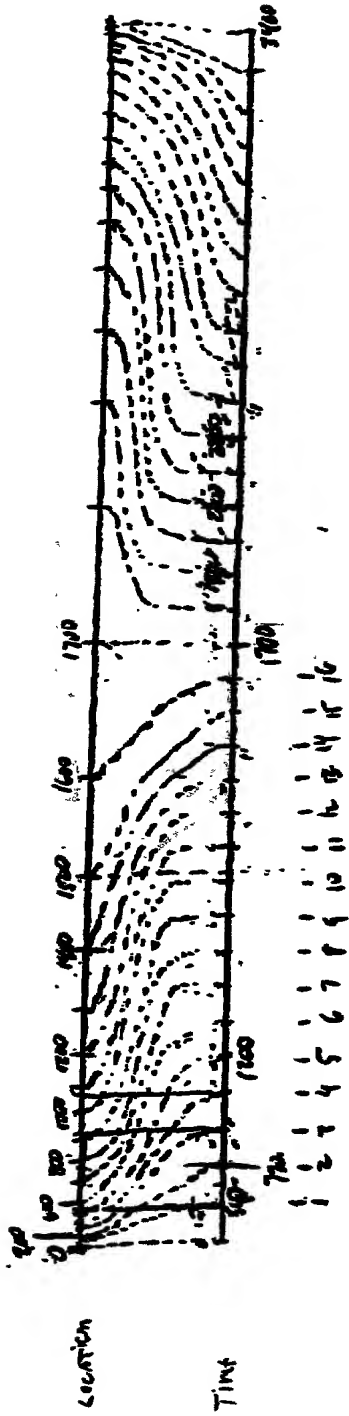

F1627

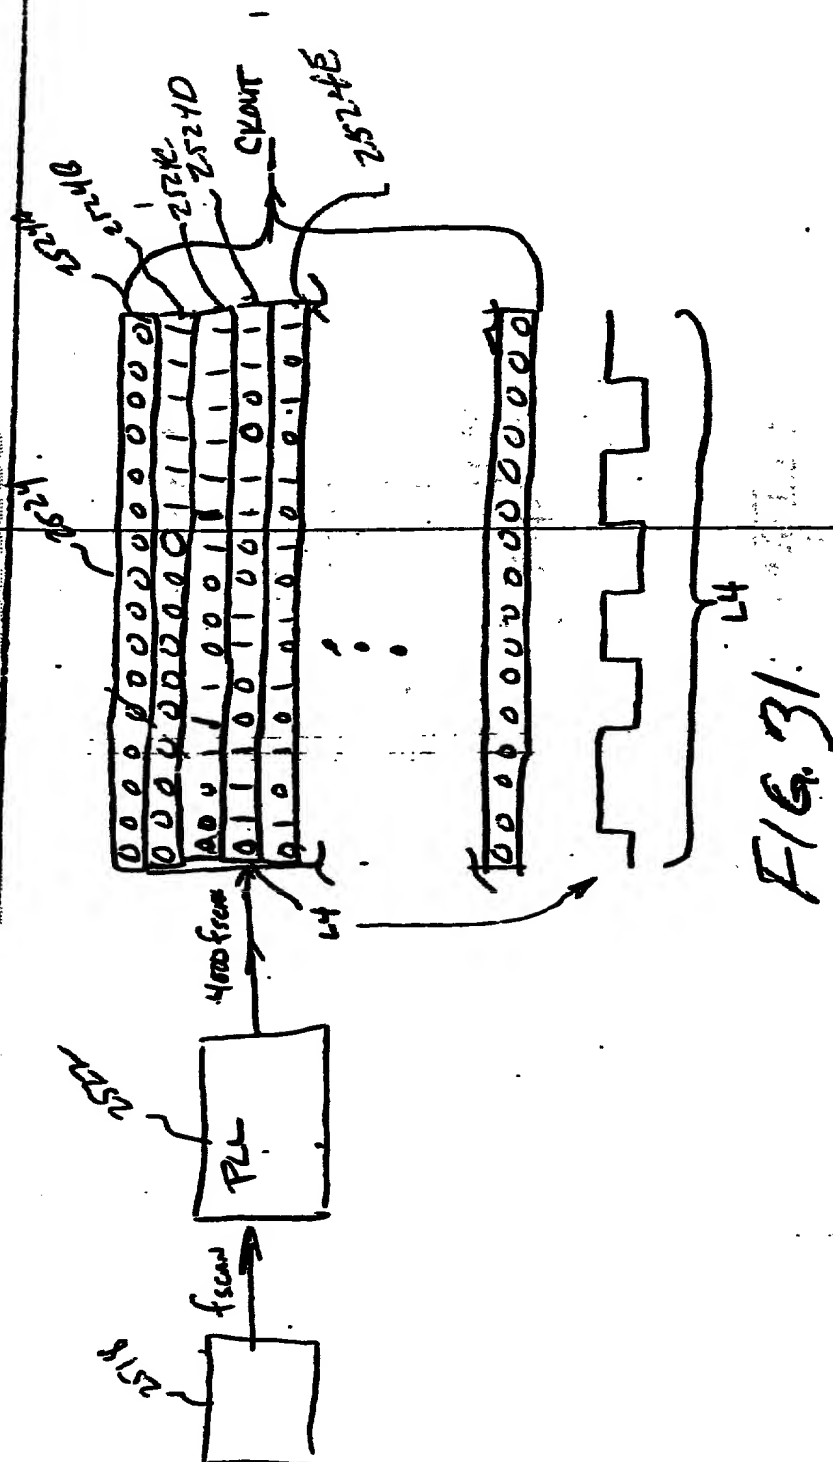

07-23
2018

F 1632

650000 2000000

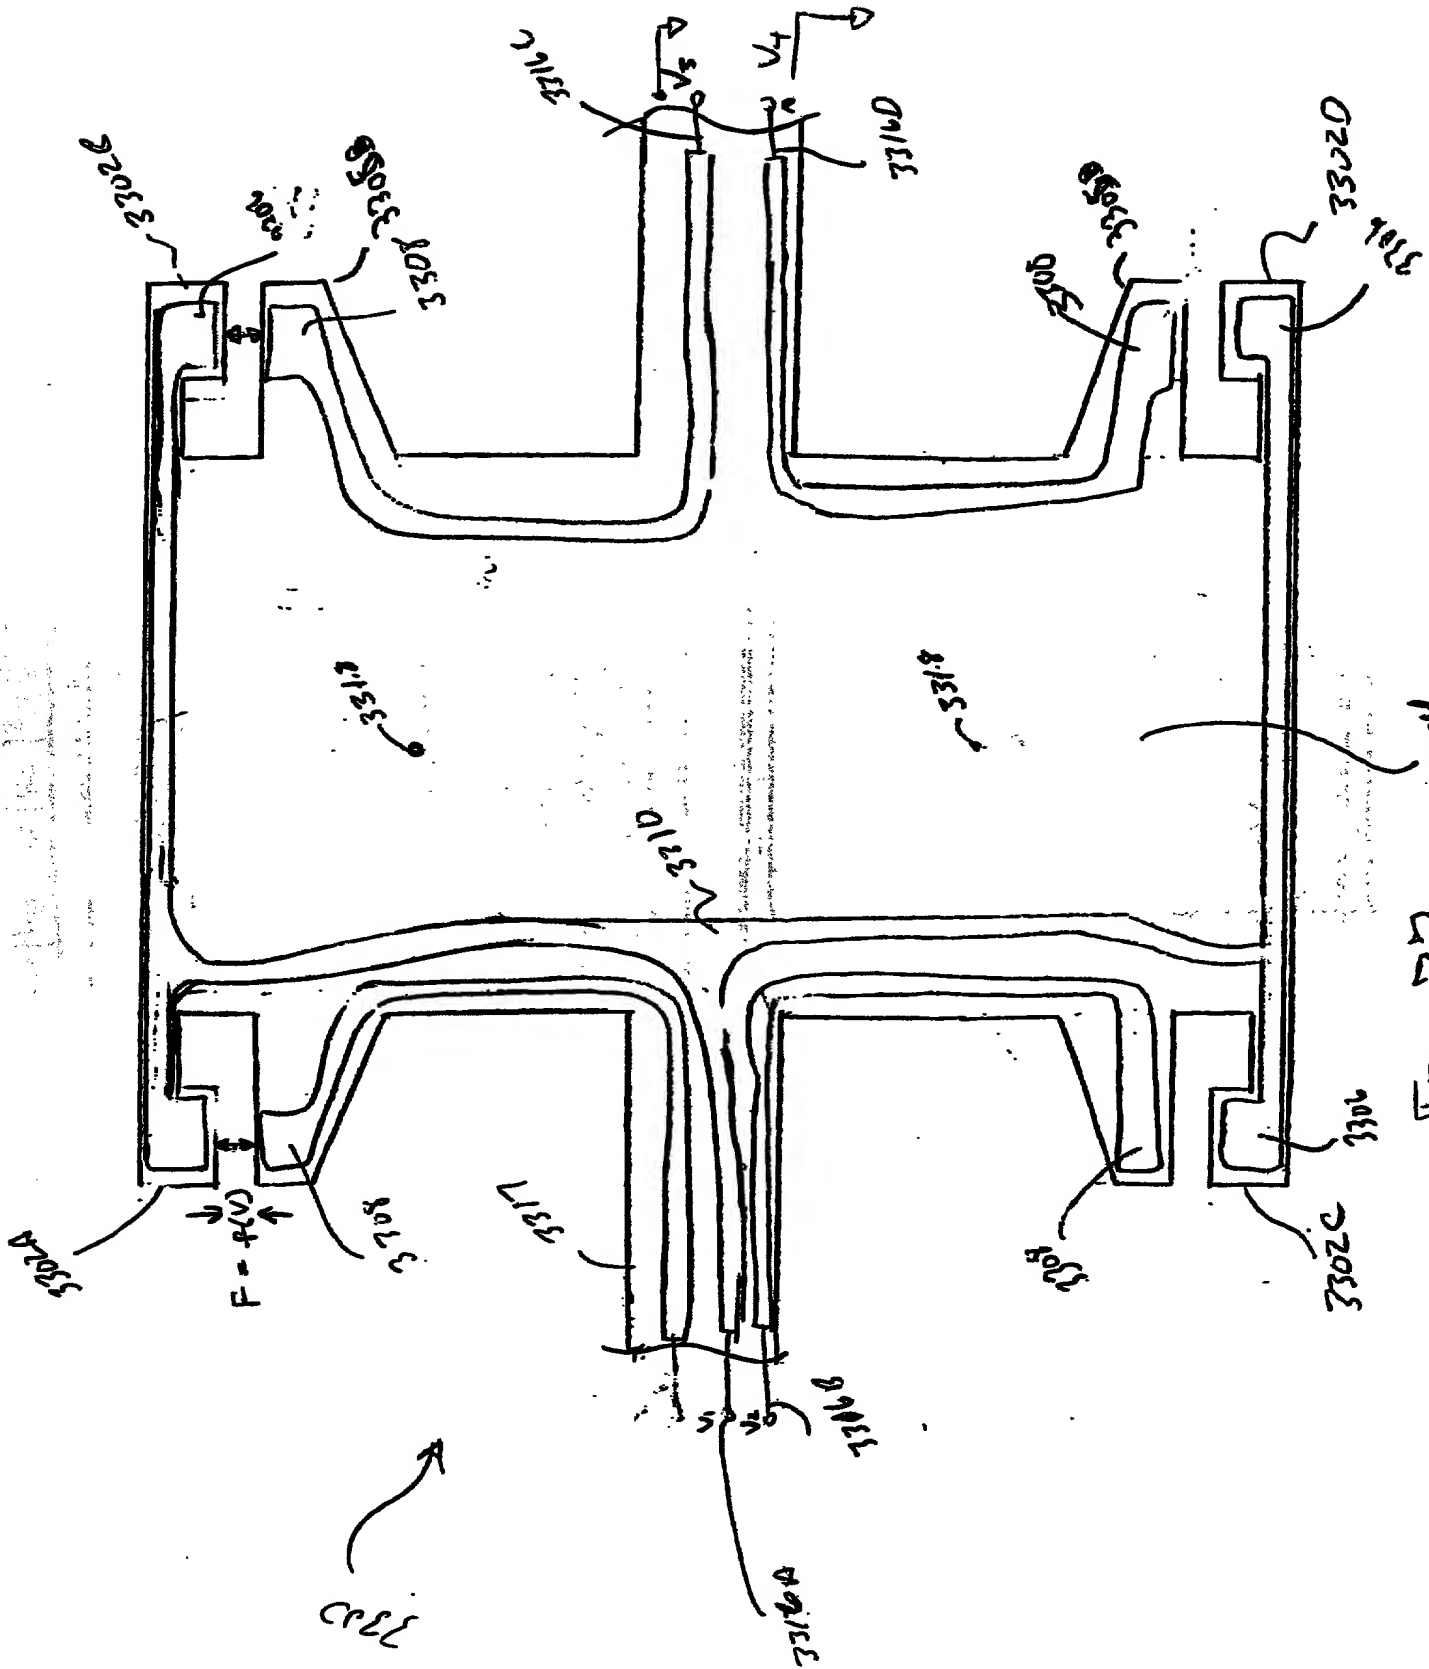


FIG. 33

665030 9296366



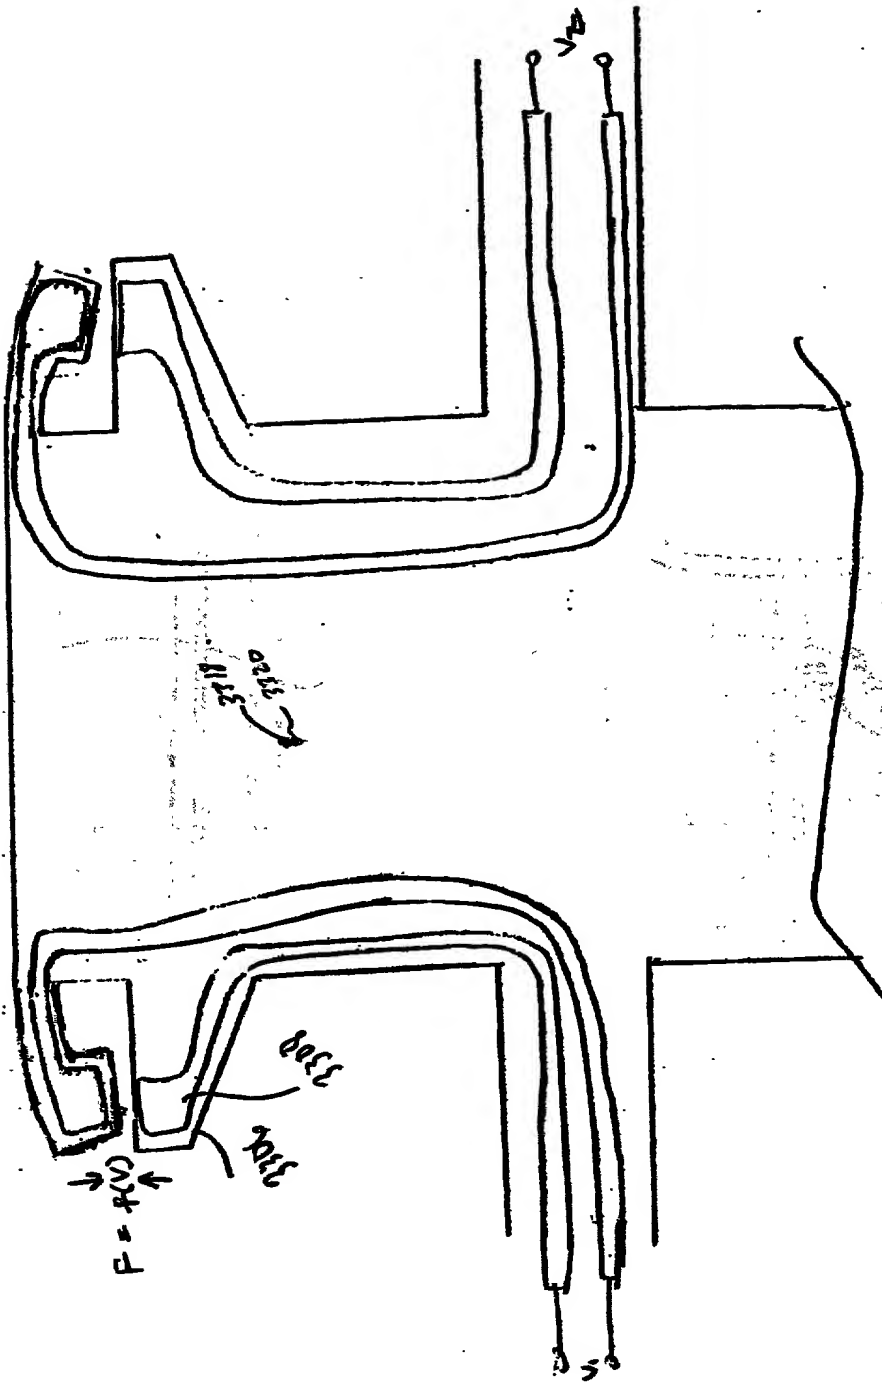


FIG 34

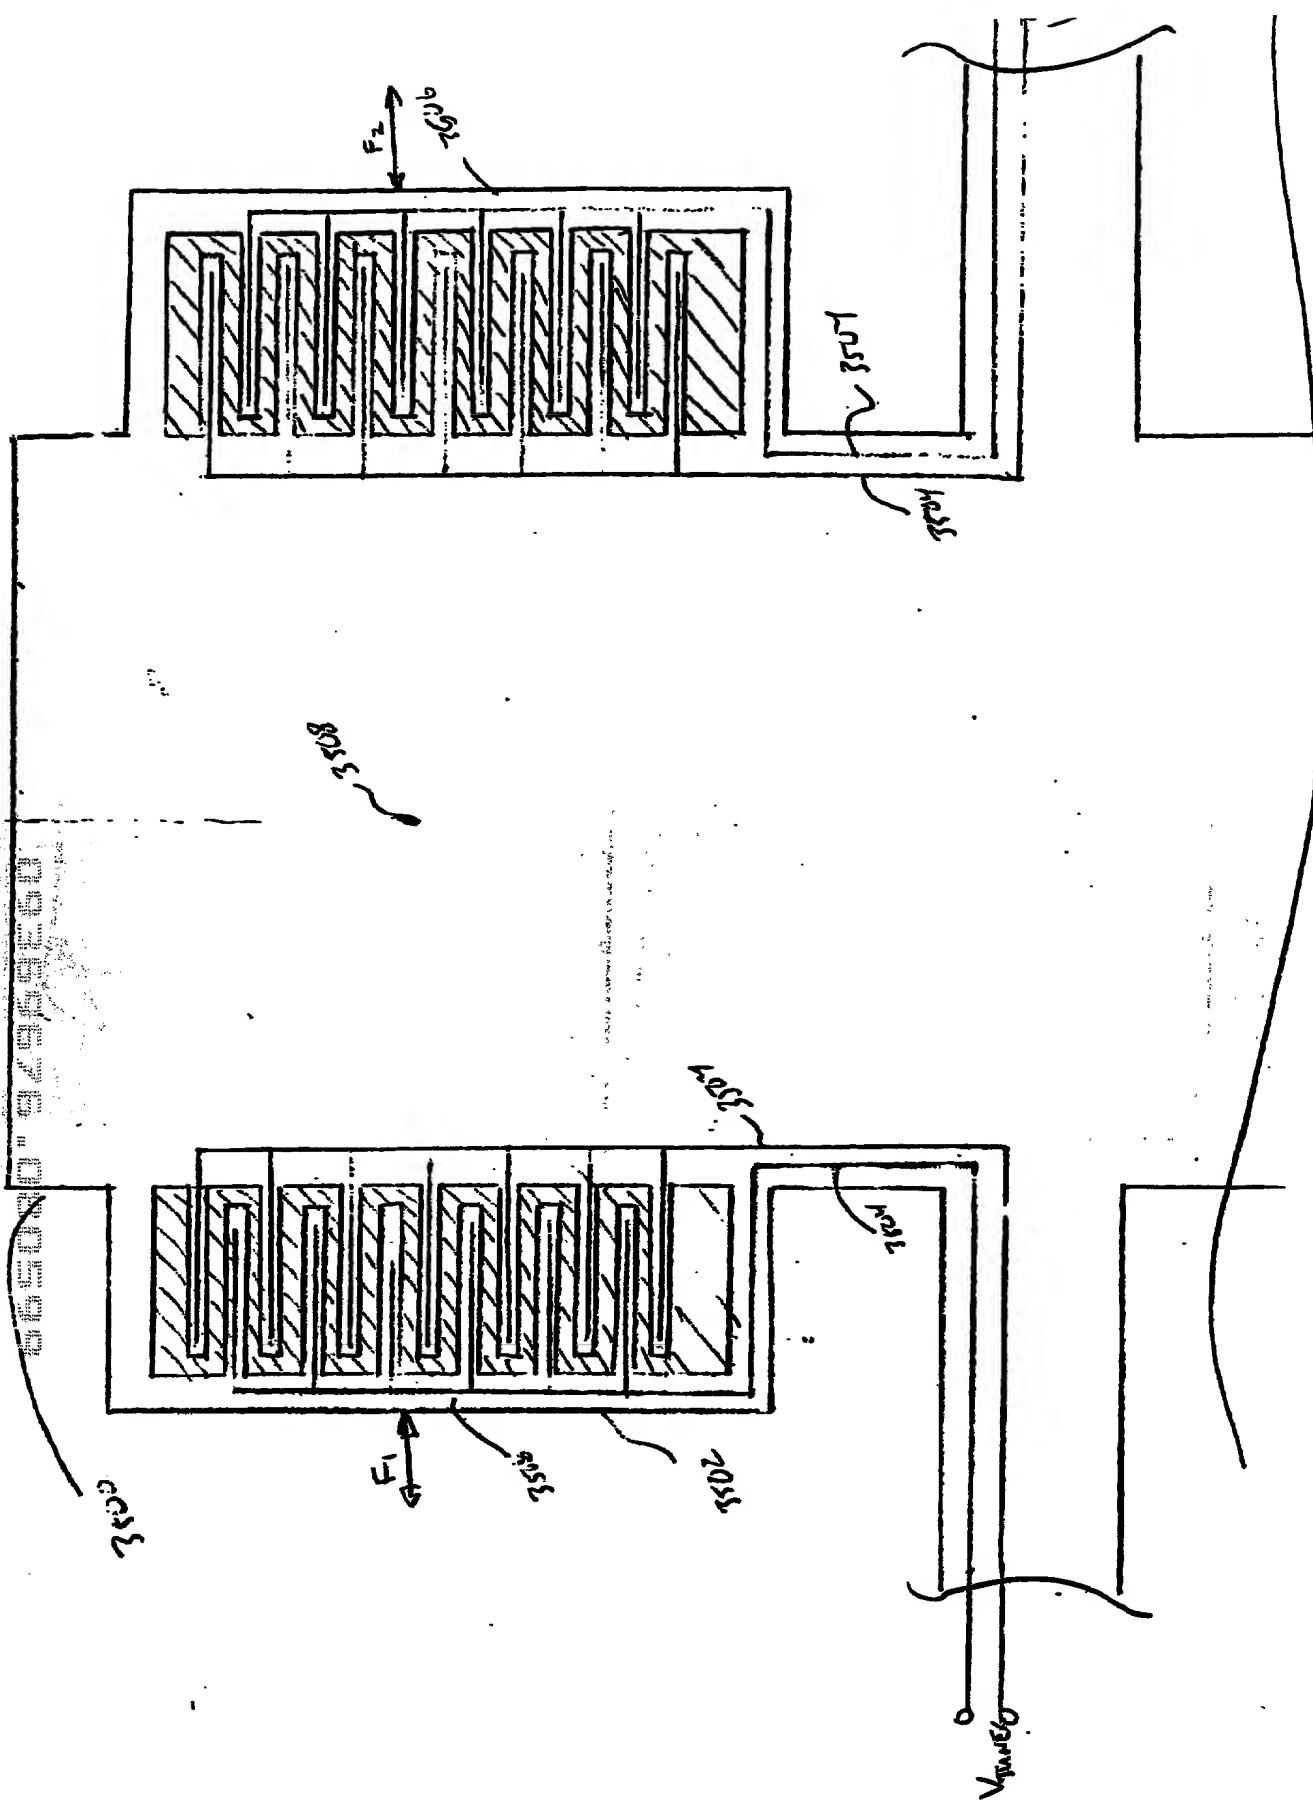

F/G 35

THE **NEW** **YORK** **PUBLIC** **LIBRARY**

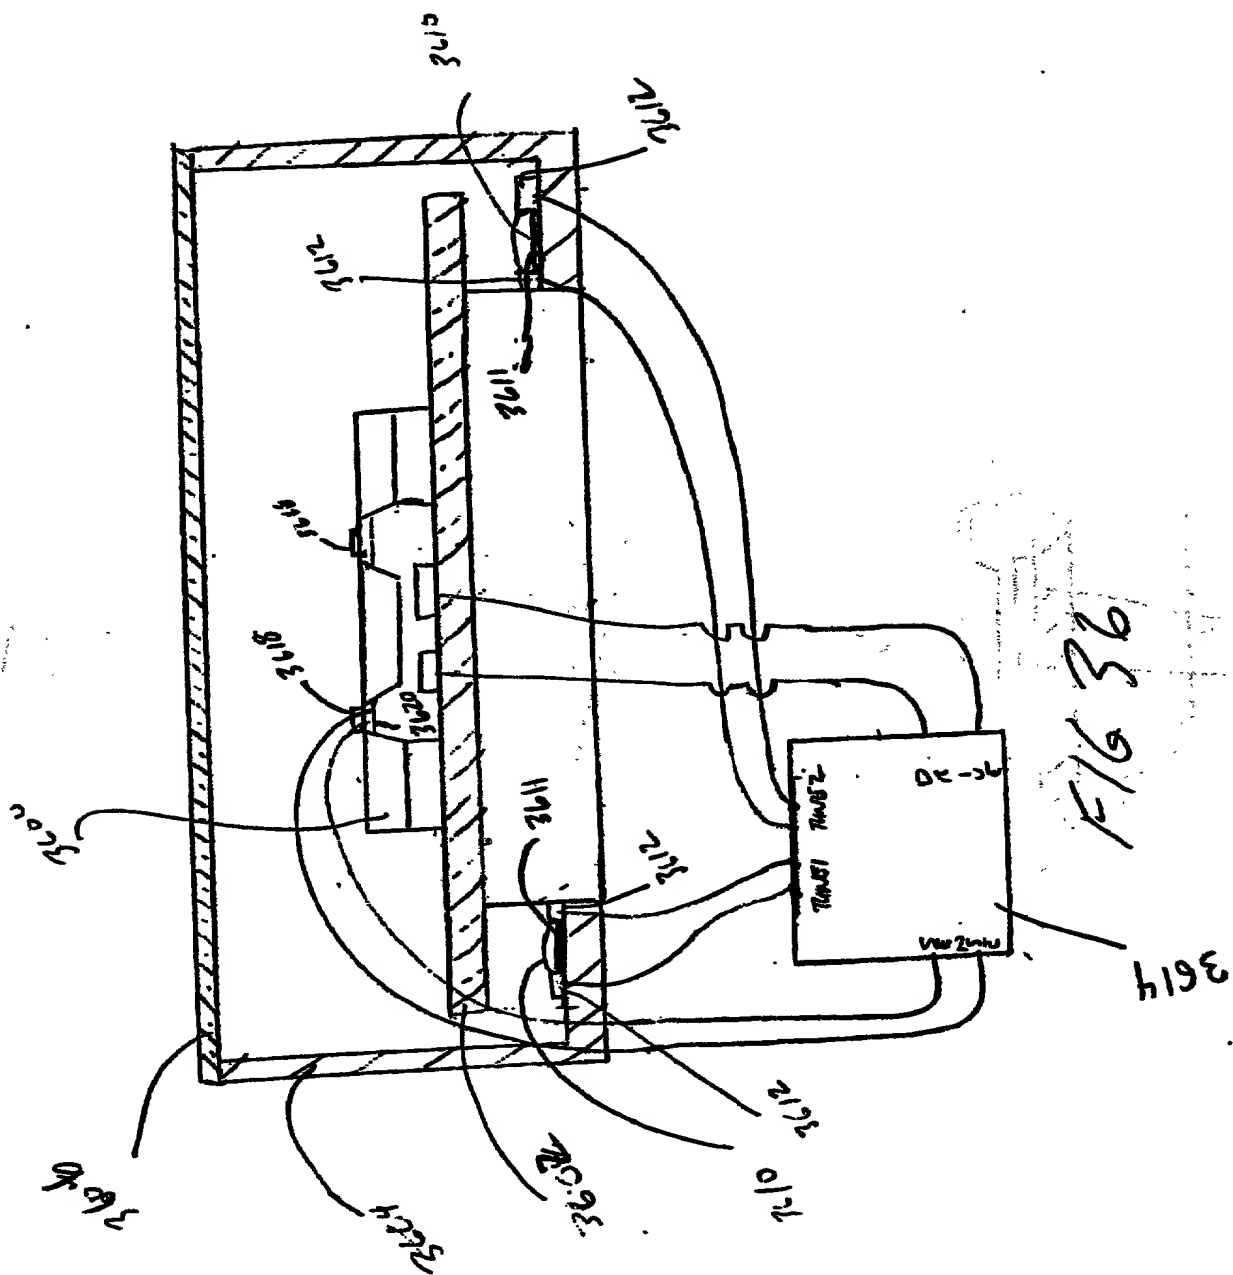

665080 02059560

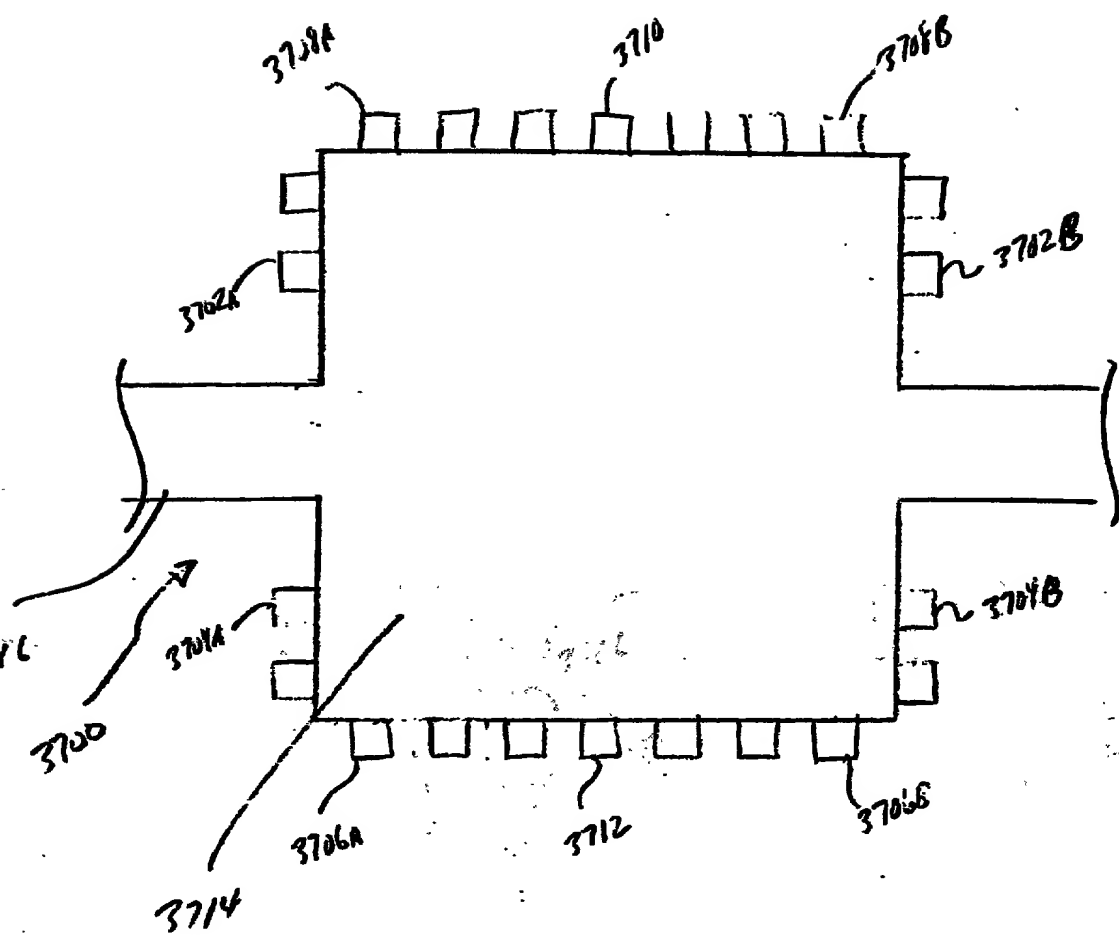


FIG 37

665080-9/2009050

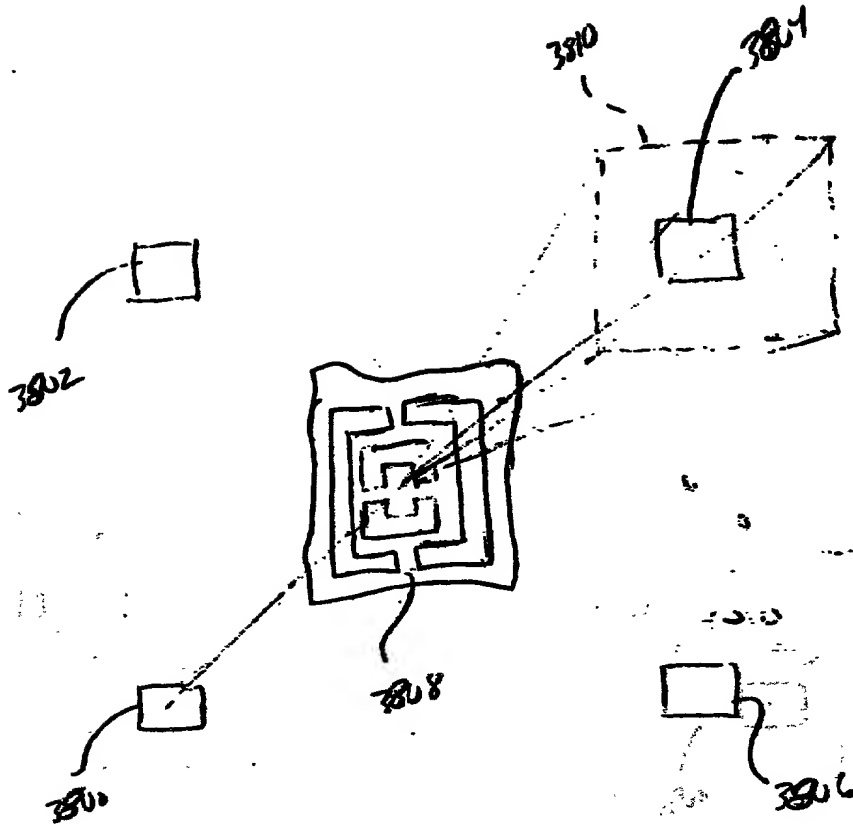


FIG 38

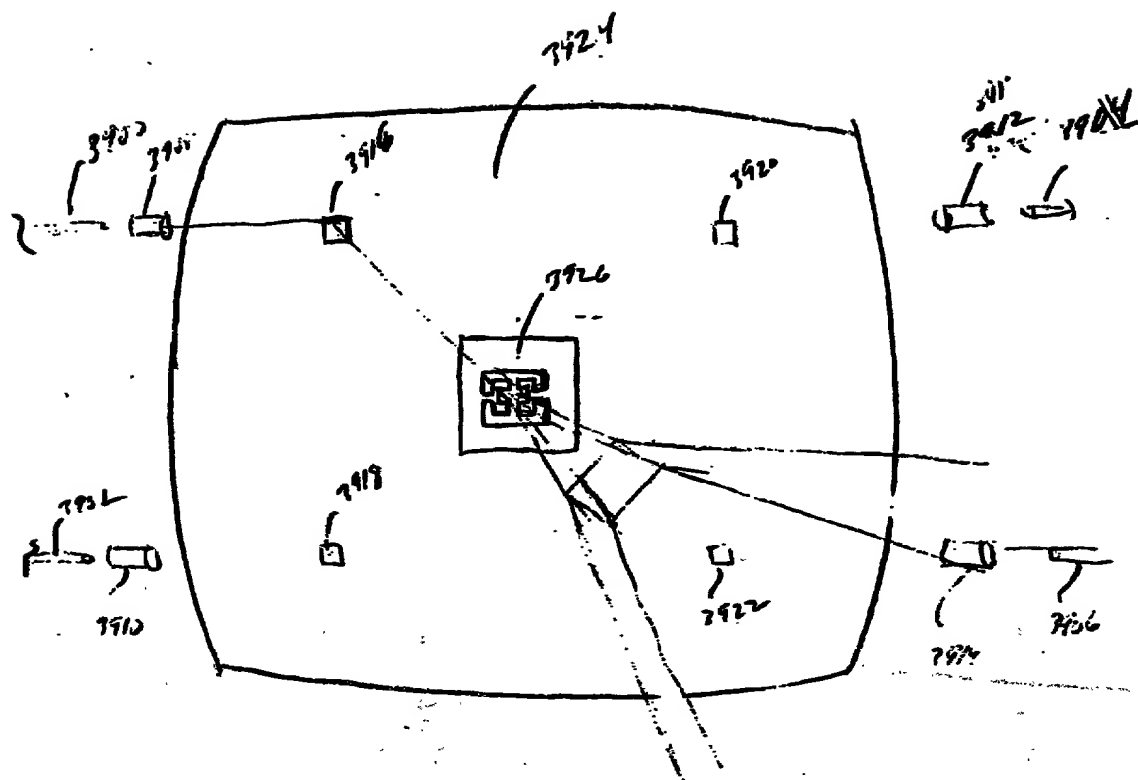
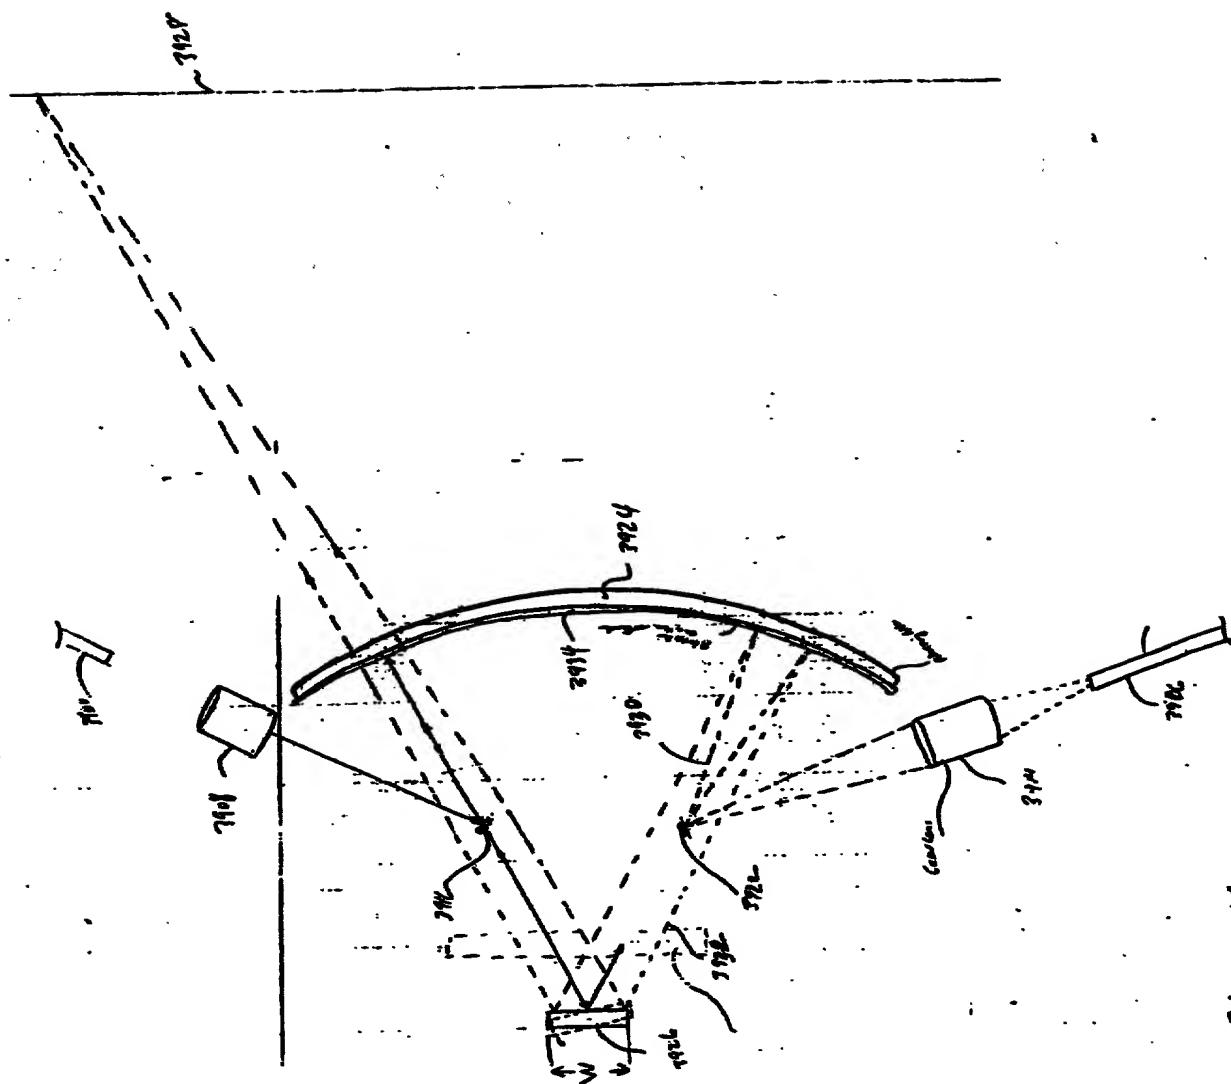


FIGURE 39

65080-928650

[illegible]

RECEIVED - 1967

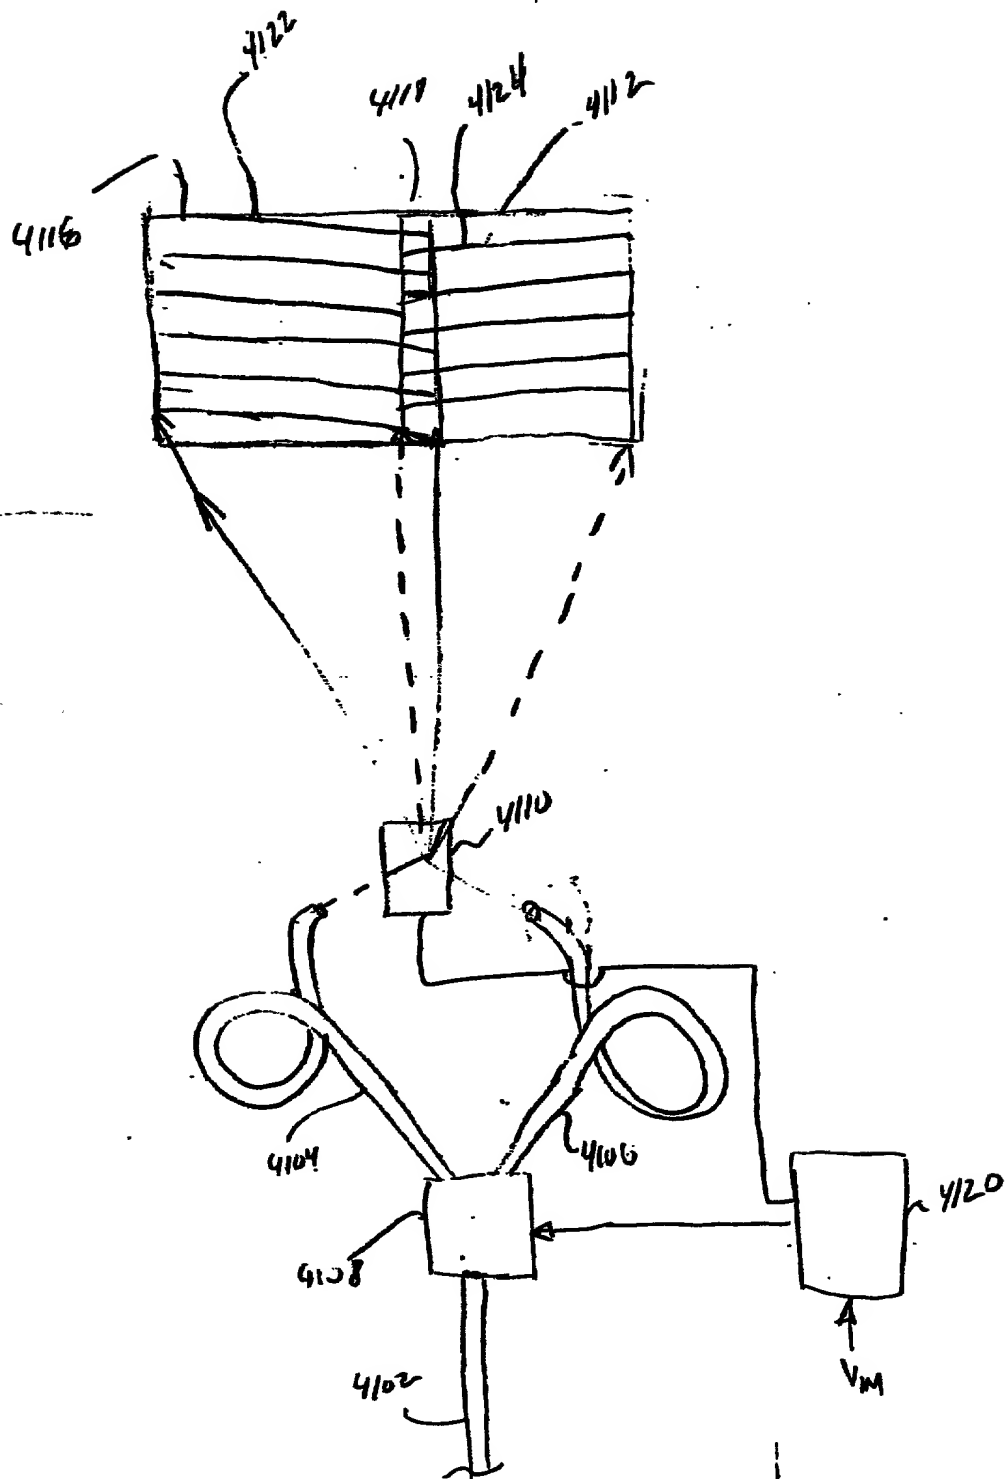


FIG 41

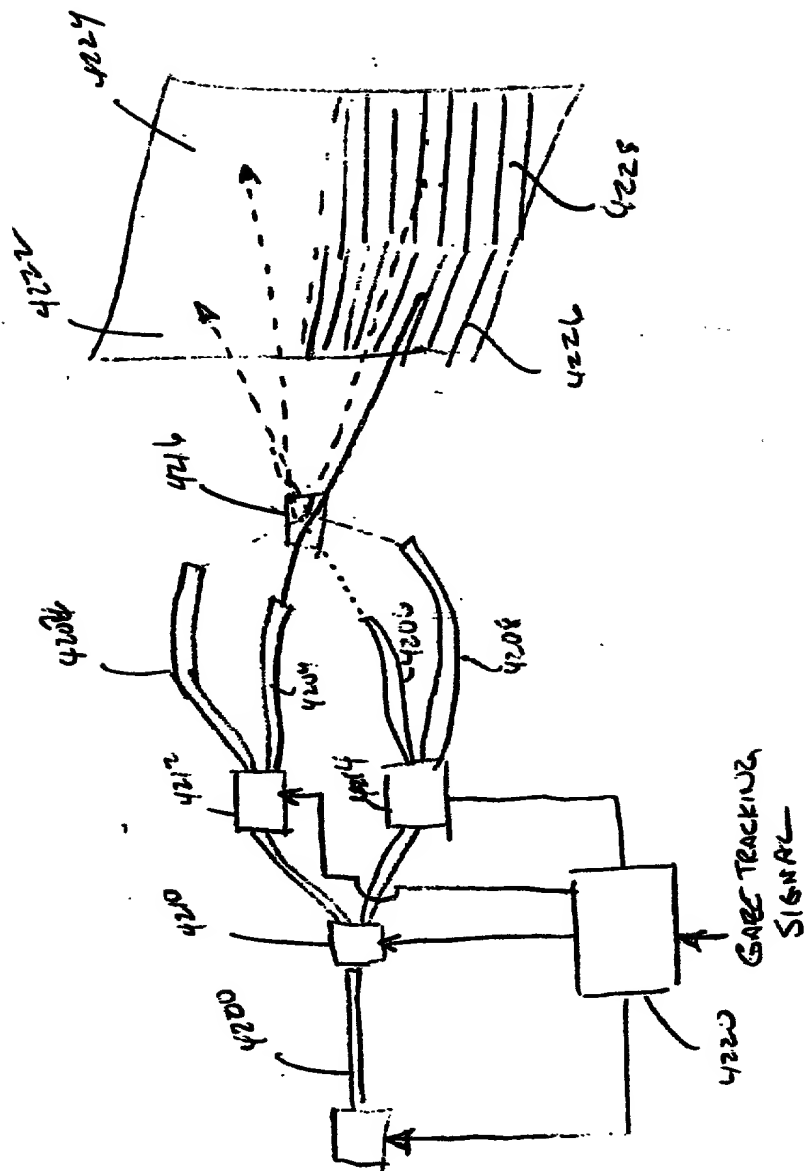


FIG 42

DECLARATION FOR UTILITY PATENT APPLICATION				Express Mail No.	EL440420280US	
				Attorney Docket No.	MVIS 98-28	
				First Named Inventor	Hakan Urey	
				Application No.		
<input checked="" type="checkbox"/>	Declaration Submitted with Initial Filing	OR	<input type="checkbox"/>	Declaration Submitted after Initial Filing	Filing Date	August 5, 1999
					Group Art Unit	
					Examiner Name	

As a below-named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Scanned Display with Switched Feeds and Distortion Correction

the specification of which

☒ is attached hereto

OR

☐ was filed on (MM/DD/YYYY) [] as U.S. Application Number or PCT International Application Number [] and was amended on [] (if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified application, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as described in Title 37 Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code § 119 (a)-(d) or § 356(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)

655000 97959560

I hereby claim the benefit under Title 35, United States Code § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application Number	PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number


As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Clarence T. Tegreene	PTO Reg. No. 37,951
----------------------	---------------------

Direct all correspondence to the correspondence address below:

Clarence T. Tegreene, Esq.
Microvision, Inc.
19910 North Creek Parkway
P.O. Box 3008
Bothell, WA 98011
(425) 415-6847
(425) 481-1625 facsimile

I hereby declare that all statements made herein of my knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of First Inventor							
Given Name (first name and middle initial)				Family Name or Surname			
Hakan				Urey			
Inventor's Signature				Date	July 29, 1999		
Residence: City	Redmond	State	WA	Country	USA	Citizenship	Turkey
Post Office Address	18574, NE 57th Street, Redmond, WA 98052						

Name of Second Inventor							
Given Name (first name and middle initial)				Family Name or Surname			
Inventor's Signature				Date			
Residence: City		State		Country		Citizenship	
Post Office Address							

Name of Third Inventor							
Given Name (first name and middle initial)				Family Name or Surname			
Inventor's Signature				Date			
Residence: City		State		Country		Citizenship	
Post Office Address							

OMB 0651-0032